Global Top 500 Companies' Partnership

世界500强企业合作伙伴

永利百合 二十年专注研制链传动

您的动力·我来传动

摩托车链条&链轮
Motorcycle Chains&Sprockets

杭州永利百合控股集团有限公司

Hangzhou Unibear Holding Group Co. Ltd

地址：浙江省杭州市萧山区义桥工业园区

Add: Yiqiao Industrial Park, Xiaoshan, Hangzhou, China

Tel: (86)-571-82405888

Fax: (86)-571-82405518

E-mail: unibear01@unibear.com

PC: 311256

意向咨询欢迎联系：

国外销售：0571-82407388

国内销售：

工业链&农机链：0571-82419808

摩托车链：0571-82405088

摩托车链轮套链：0571-82419116

停车库链：0571-82402267

关注微信公众号

关注微信商城

官方网站：www.unibear.com

German Technology

德国技术

企业简介 Company Introduction

杭州永利百合控股集团有限公司，始创于1995年，建筑面积22万多平方米，员工 1200余人，注册商标有UNIBEAR®、SLCC®、Oditer®和Odiking®。公司采用国际先进的生产设备和工艺技术，专注研发生产链条链轮，产品性能优越、品质稳定，通过ISO、ANSI、BS、DIN和JIS质量标准认证，获得“国家火炬计划项目”、“浙江省企业技术中心”和“浙江省创新型试点企业”等诸多荣誉。公司产品二十年来畅销于欧洲、美洲、日本、东南亚、中东及非洲市场等60多个国家，受到世界各地客户的广泛赞誉。

公司生产包括传动链、输送链、农机链、提升链、特殊用途链、不锈钢链、摩托车链、摩托车链轮等八大类型、五十多个系列、几千种规格的链传动产品，广泛应用于工业、农业、林业、矿山、冶金、筑路、石油、建材、轻工、造纸、家电、日化、食品、陶瓷、环保、车库等国民经济众多行业的机械作业。

永利百合将始终秉承“质量为本、创新为魂”的方针、“客户满意的产品”的质量承诺，以不断完善的研发生产和售后服务来满足更多国内外客户的需求。

Hangzhou Unibear Industrial Co. Ltd. was founded in 1995, occupying an overall floorage of 220,000 square meters, hiring more than 1200 employees. It has several registered trademarks like UNIBEAR®, SLCC®, Oditer® and Odiking®.

Unibear boasts itself of advanced production equipments and processing technology that are paralleled with international level. It has been all along dedicated to conducting research and development on all kinds of chains and sprockets. Its products excellently pass major international quality standards of ISO, ANSI, BS, DIN and JIS, due to their superior performance and stable quality. Furthermore, it was crowned several reputations such as "National Torch Program Project", "The Entrepreneurial Technology Center of Zhejiang Province" and "Innovation-oriented Pilot Enterprise of Zhejiang Province", etc.For 20 years along Unibear's products were prevailingly spread all over Europe, America, Japan, Southeast Asia, Middle East and Africa, etc, attaining broad compliments from various customers of the world.

Unibear's product line consists of thousands of chains with 8 categories over 50 series, like transmission chain, conveyor chain, agriculture chain, hoist chain, specialized chain, steel-stainless chain, motorcycle chain, motorcycle sprocket, etc. They are broadly applied to machinery operation in mass industries of manufacturing, agriculture, forestry, mining, metallurgy, road-paving, oil-exploring, architecture, light industry, papermaking, household appliance, commodity, Foods, ceramics, environmental protection, garage, and so on.

Unibear will persist in the principle of "Quality assurance-oriented, in the spirit of continuous innovation", and guarantee for "Products to satisfy customers" to meet the various demand from both domestic and overseas customers with improved R&D and production capability, as well as upgraded after-sales service.

发展历程 Development Course

1995 成立永利电器、专业生产链条零件

Establish YongLi Electric Appliance, specialized in producing chain components;

1999

- 更名为杭州永利百合实业有限公司、“永利百合/ UNIBEAR”商标全球注册
- 开始生产摩链、工业链、农机链、非标链等
- 建设国内一期厂房，成立检测中心及市技术研发中心
- Renamed as Hangzhou Unibear Industrial Co. Ltd, Unibear Chinese and English logo registered globally
- Begin the production of motorcycle chain, industry chain, agriculture chain and non-standardized chain, etc.
- Construct domestic 1st stage factory building; set up Inspection Center and Technology R&D Center

2004 建设国内二期厂房，成立公司党支部，职工文化家园建成

Construct domestic 2nd stage factory building; Found company's CPC party branch; Set up staff entertainment cente

2010

- 成立欧迪泰尔贸易公司，及百合汇酒庄
- 成立链轮及冷镦分厂
- Establish Oditer Trading Company, and Baihehui wine cellar
- Set up sprocket and cold-heading plant

2014

- 荣获“杭州出口名牌”称号
- 成立永利百合集团公司
- 曹永年董事长荣获第十届杭州市优秀企业家
- Crowned as “Famous Brand in Hangzhou Exports”
- Establish Unibear Holding Group
- Chairman Clive Cao titled as “The 10th Outstanding Entrepreneur in Hangzhou”

2015 建设国内三期厂房、立项为科创园

Construct domestic 3rd stage factory building, approved as the S&T innovation park

2016

- 成立新链轮、板式链、扶梯链车间
- 曹永年董事长荣获“爱心慈善家”称号
- Set up new plants for sprocket, leaf chains, escalator chains
- Chairman Clive Cao crowned as “The Philanthropist”

企业简介 Company Introduction

国家级省级权威资质
National & Provincial Authoritative Qualification

品牌商标类
Brand & Trademark Class

行业协会类
Industry Association Class

社会责任与荣誉
Social Responsibility & Honor

质量管理体系认证
Quality Management System

环境管理体系认证
Environment Management System

职业健康安全管理体系认证
Occupational Health and Safety Management System

全球销售网络 Global Sales Network

二十年来，公司产品出口到全球*60*多个国家，畅销于欧洲、美洲、日本、东南亚、中东及非洲市场，受到世界各地客户广泛赞誉。

For two decades, our products were imported to over 60 countries worldwide, prevailingly spread all over Europe, America, Japan, Southeast Asia, Middle East and Africa, etc. attaining broad compliments from various customers of the world.

全球OEM合作伙伴 Global OEM Partners

iwis antriebssysteme · JOHN DEERE · TOYOTA · HONDA · NEW HOLLAND AGRICULTURE · XIZI-IUK 西子石川岛

PRO TORK · WIPPERMANN · KettenWulf · FORTTE · DIAMOND CHAIN COMPANY · D.I.D

KANA Katayama Chain, CO.,LTD. · FEELER · FSCM MANUFACTURING INDONESIA · STANFORTHS Motorcycle Wholesale Limited · Pakistan Chain Center

销售产品性能优越 Superior Products

- 优质合金钢材料；
- 超耐磨长使用寿命；
- 更高抗拉和抗疲劳性能；
- 先进热处理和表面处理工艺；
- 链条100%预拉减少初期伸长率；
- 创新链轮“一次冲压成型”技术；
- Fine-quality alloy-steel material;
- Super wear-resistant and prolonged service life;
- Higher tensile strength and fatigue resistance;
- Advanced heat treatment and surface polishing technique;
- 100% pre-stretch, decreasing chain's elongation;
- Innovative sprocket fine blanking of "Once-Punch-Forming" technology;


传动链
Transmission Chain


输送链
Conveyor Chain


农机链
Agricultural Chain


提升链
Hoist Chain


特殊用途链
Specialized Chain


不锈钢链
Stainless Steel Chain


摩托车链
Motorcycle Chain


摩托车链轮
Motorcycle Sprocket

ADVANCED PRODUCTION EQUIPMENT
先进的生产设备

钢带 半成品仓库
Steel strip
Semi-finished products warehouse

200吨高速冲床
200T high speed press

自动切削机
Automatic pin cuting machine

布斯卷制车间
Bush-curling Workshop

全自动热处理(一厂)
Automatic mesh belt conveyor furnace
(Factory one)

全自动热处理(二厂)
Automatic mesh belt conveyor furnace
(Factory two)

日本进口慢走丝线割机
Japan-imported slow-feeding wire-cutting machine

数控车床
Digital controlled lathe

自动倒角机
Automatic chamfering machine

激光打标机
Laser marking machine

链轮-全自动数控高吨位精密冲床(1)
Sprocket - Automatic digital-controlled
large tonnage precise lathe(1)

链轮–全自动数控高吨位精密冲床(2)
Sprocket - Automatic digital-controlled
large tonnage precise lathe(2)

ADVANCED PRODUCTION EQUIPMENT
先进的生产设备

高速装配机
High speed assembling machine

缺零件检测
Inspetion of missing parts

全自动装配线
Automatic assembling line

高精度四方铆头机
Well-finished pin quad rivet machine

▲ 自动装配线流程图
AUTOMATIC ASSEMBLY LINE FLOW CHART

装配 ASSEMBLING → 铆头 RIVETING → 缺零件检测 INSPECTION OF MISSING PARTS → 预拉跑和 PRE-STRETCHING AND RUNNING → 上油 LUBRICATING → 数目 LINKS → 包装 PACKING

备注：1.预拉跑和，拉力达到链条拉力的50%，解决了链条初期的伸长；
Note: 1. Pre-stretching and running at 60% of the tensile strength, it solves the problem of elongation of the chain in the initial stage of use.
2.我司采用链条油脂为台湾进口JS003油脂，保证了耐磨效果；
2. We use the grease JS003 from Taiwan which guarantees the wear-resistance of the chain

EXCELLENT TESTING DEVICES
完善的检测设备

检验中心
Testing Center

化学分析台
Chemical analysis platform

碳硫微机自动分析仪/分 光光度计
Material chemical analysis machine
Material chemical tester

金相显微镜
Metalloscope

HV-5 维氏硬度hardness tester

全自动显微维氏硬度计
Microh

EXCELLENT TESTING DEVICES

完善的检测设备


邵氏(橡胶)硬度计
Shore (Rubber) hardness tester


HV-1显微维氏硬度计
HV-1 Micro-Vickers hardness tester


喷丸强度测量仪
Shot peening strength tester


链条扭曲测量仪
Chain twist testing machine


200KN高频疲劳试验机
200KN high frequency fatigue testing machine


50KN压出力试验机
50KN Press-outforce tester


表面粗糙度测量仪
Surface roughness tester


数显碳硫自动分析仪
Carbon sulfur automatic analyzer
金相预磨机
Metallographic pre-grinding machine


金相抛光机
Metallographic polishing machine


数显链条测量仪
Instrument for measuring chain length


液压万能试验机
Hydraulic universal material testing machine


200KN材料拉力试验机
200KN material tensile strength testing machine


投影仪
Profile projector


影像测量仪
Image measuring instrument


大型摄像金相显微镜
Large scale photographic metalloscop


直读光谱仪
Spectromax


链条中速磨损实验机
Mid-speed chain abrasion testing machine


盐雾试验机
Mid-speed chain abrasion testing machine

PRODUCT CHAPTER
产品篇

普通链板形状
Standard link plate

宽腰链板形状
Wide-waist link plate contours

宽腰链板设计
增大腰宽以提高疲劳强度。
Design of link plate waist
Increase in width of waist for combating fatigue.

钢球挤孔
链板孔最终通过钢球挤压以保证最大的抗疲劳性能。
Ball drift
The plate holes are finally ball-burnished to assure maximum resistance to fatigue failure.

零件喷丸处理
链板和滚子经喷丸处理后可提高疲劳强度。
Shot Peened Parts
Link plates and rollers are shot peened for greater fatigue strength.

A
015-016
摩托车传动链条
MOTORCYCLE TRANSMISSION CHAIN

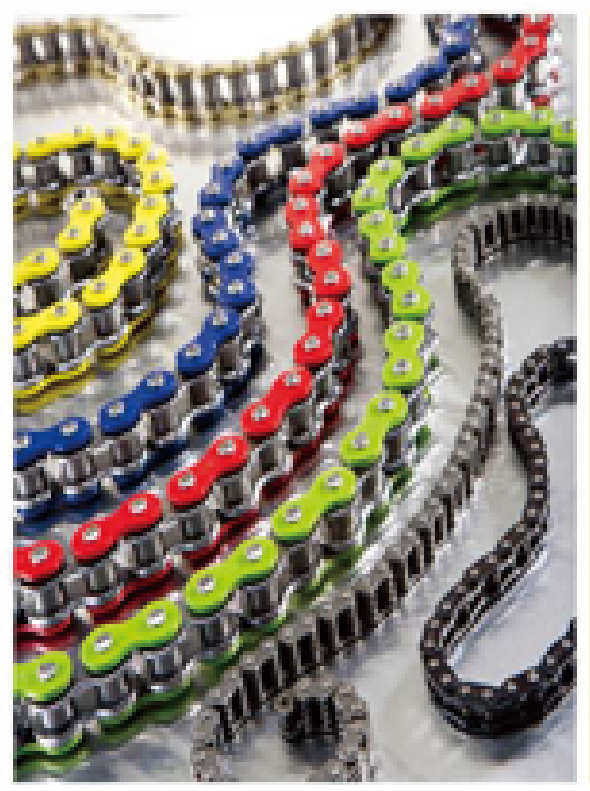

B
017-018
高速赛车用摩托车传动链条
X-RING CHAIN
O-RING CHAIN

C
019-020
摩托车发动机正时链条
MOTORCYCLE ENGINE MECHANISM CHAIN (TIMING CHAIN)

D
021-022
齿形链
SILENT MOTORCYCLE CHAIN

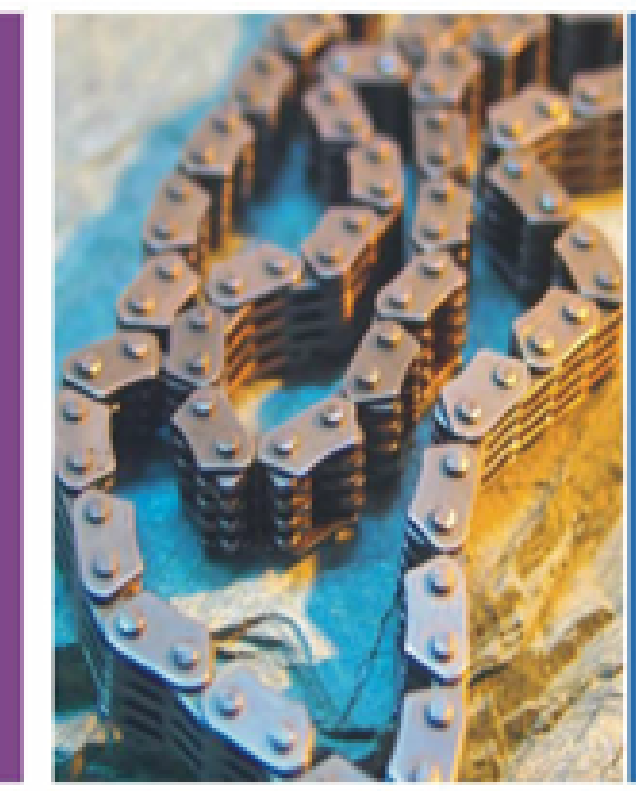

E
023-034
套链系列
MOTORCYCLE SPROCKET KITS

F
035-040
齿轮系列
MOTORCYCLE SPROCKET AND GEAR

创新中国-高品质摩托车链条链轮

China's No.1 Innovation & High Quality Motorcycle Chains and Sprockets

- 创新研发的齿形“一次冲压成型”技术；
  Innovatively researching and developing the “Once-Punch-Forming” technology for teeth shape;
- 齿沟圆与链条滚子配合间隙≤**0.05mm**，优于国内同行(0.3-0.5mm)**80%**以上，啮合运转中超静音；
  Fit clearance between chain roller and sprocket teeth arc≤0.05mm, superior to domestic competitors(0.3-0.5mm) by 80%, without noise during meshing operation;
- 冲齿模具采用日本进口精密慢走丝加工，搭配领先的落齿工艺，齿沟圆粗糙度≤**1.6μm**，比国内同行的传统滚齿工艺粗糙度（≤3.2μm）降低**50%**，远优于国家标准参数（≤6.4μm），极大提高耐磨性、延长使用寿命；
  Japan-imported slow-feeding wire-cutting machine for teeth punching mould, with advanced punching technique, teeth arc roughness≤1.6μm, 50% lower than domestic competitors' roughness(≤3.2μm) produced with traditional gear hobbing technique, even much superior to national standard(≤6.4μm), greatly improving wear-resistance and prolonging service life;
- 采用全自动网带炉热处理加工、齿表面硬度达56-62HRC，使用原装进口高科技超耐磨油脂，耐磨性能提高**50%**、使用寿命可达**30,000**公里；
  Heat treatment by automatic mesh belt conveyor furnace, teeth surface hardness reaching 56-62HRC, using imported high-tech grease, increasing wear-resistance by 50%, 30,000km guaranteed
- 创新一次冲压成型技术，确保齿形和中心孔同心度≤**0.05mm**、滚齿同心度≤**0.2mm**，显著提高链轮和链条的啮合稳定性，避免运转跳动和噪音；
  Advanced “Once-Punch-Forming” technology, ensuring concentricity between teeth panel and central hole≤0.05mm, rolling teeth≤0.2mm, increasing meshing stability between chain and sprocket, preventing chain bouncing and noise occurred;
- 表面烤漆工艺，如发红、发黄、发橙、发绿、发蓝、发黑等，满足各种外观需求；
  Surface stoving varnish technique, such as red, yellow, orange, green, blue, black, etc. meeting various appearance demands;
- 摩链链板表面电镀铜、锌、镍、铬等，链条更耐腐蚀、优化视觉效果；
  Motorcycle chain plate surface electroplated with copper, zinc, nickel, chrome, etc. ensuring chain more corrosion-resistant and modifying visual effect
- 选用优质合金钢，采用全自动网带炉热处理，表面经无心磨和喷丸工艺，大幅提高链条抗拉和疲劳强度；
  High quality alloy steel selected, through heat treatment by automatic mesh belt conveyor furnace, surface centerless grind and shot-peening technique, greatly improving tensile strength and fatigue resistance

VS

永利百合Unibear

创新“一次冲压成型”落齿工艺（齿沟圆粗糙度≤1.6μm），光滑光亮带好，啮合运转超静音，提高耐磨性能，延长使用寿命
Innovative “Once-Punch-Forming” fine blanking technology (teeth arc roughness≤1.6μm), with smooth and good burnishing band, without noise during meshing operation; improving wear-resistance and prolonging service life.

其他厂家Competitors

传统滚齿工艺（齿沟圆粗糙度≤6.4μm），粗糙光亮带差，啮合运转有噪音，磨损度大，减少使用寿命
Traditional gear hobbing technique (teeth arc roughness≤6.4μm), with rough and bad burnishing band, noise occurred during operation, easily worn off and reducing service life.

UNIBEAR® SLCC®

Standard

永利百合链号 UNIBear Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plates thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	疲劳强度 Fatigue
	P	d_1 max	b_1 min	d_2 max	max	L max	h_2 max	T	Q min	Q_0	amx
	mm	mm	mm	mm	mm	mm	mm	mm	kn	kn	kgf
415	12.7	7.75	4.88	3.98	12.5	13.9	10.4	1.5	11.8	12.5	380
420	12.7	7.77	6.35	3.98	14.5	16.1	12	1.5	16	16.5	380
428	12.7	8.51	7.75	4.45	16.5	18.06	12	1.5	17.8	18.5	380
520	15.875	10.16	6.35	5.08	17.7	19	15	2	26.5	29.5	650
525	15.875	10.16	7.94	5.08	18.8	20.6	15	2.03	28.8	28	650
530	15.875	10.16	9.4	5.08	20.9	22.2	15	2	28.6	29.7	650
630	19.05	11.91	9.4	5.94	22.2	24	18	2.4	35	37	800

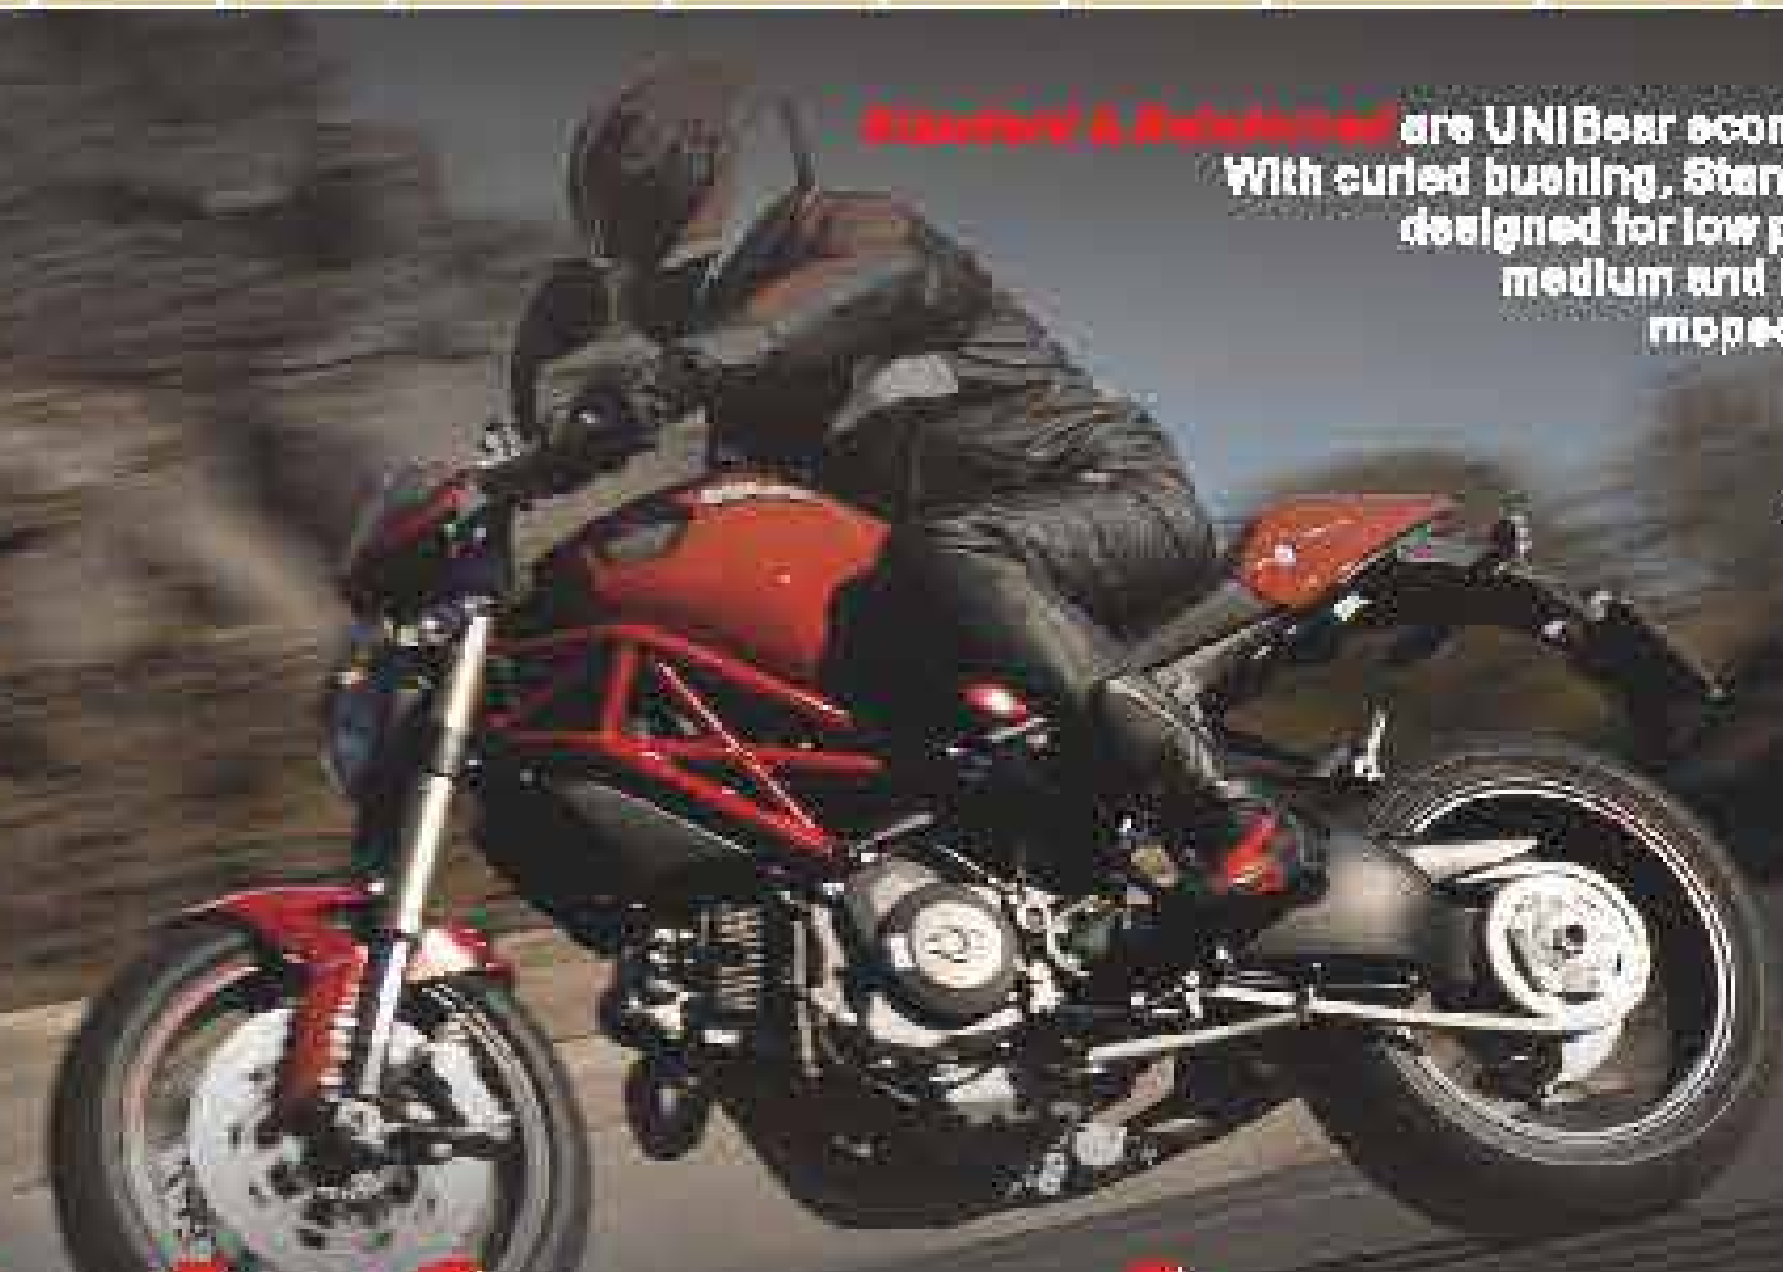

Standard & Reinforced are UNIBear economiac motorcycle chain lines. With curled bushing, Standard & Reinforced Chains are designed for low performance motorcycles with medium and low capacity up to 250CC and mopeds.

* Outer Plate Color Available: Steel Natural Color; Black Finished; Blue Finished; Yellow Finished

Reinforced

永利百合链号 UNIBear Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plates thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	疲劳强度 Fatigue
	P	d_1 max	b_1 min	d_2 max	max	L max	h_2 max	T_1	Q min	Q_0	amx
	mm	mm	mm	mm	mm	mm	mm	mm	kn	kn	kgf
415H	12.7	7.75	4.88	3.98	13.1	14.8	11.8	1.5	15.6	16.1	380
420H	12.7	7.77	6.35	3.96	15.7	17.4	12	1.5	17	17.5	380
428H	12.7	8.51	7.75	4.45	18.3	19.8	12	2.03	20.6	21.1	450
520H	15.875	10.16	6.35	5.24	18.9	20.6	15	2.42	30	31	700
525H	15.875	10.16	7.94	5.24	20.4	22.2	15	2.42	30	31	700
530H	15.875	10.16	9.4	5.08	21.8	24.2	15	2.42	30	31.5	700

可根据用户需要生产镀铜、镀锌、镀镍、镀铬链条

Copper-plated, zinc-plated, nickle-plated and chrome-plated chain available

UNIBEAR® SLCC®

Super Professional

UNIBEAR CHAIN NO.	JAPAN CHAIN NO.	Pitch		Roller Dia.	Width between inner plates	Pin Dia	Pin Length		Plate Thickness inner	Plate Thickness outer	Weight 100L	Weight 100L	Tensile Strength		Seal Type	Connecting Link	
		mm	in	mm	mm	mm	mm	in	mm	mm	kgs	lbs	KN	Lbs	O/X	Rivet	Clip
415MX	415NZ	12.70	1/2	7.75	4.78	3.98	13.30	0.524	1.50	1.50	0.70	1.54	19.00	4269.67	/	/	*
420MX	420NZ	12.70	1/2	7.77	6.35	3.96	15.70	0.618	1.50	1.50	0.81	1.79	21.00	4719.55	/	/	*
428MX	428NZ (428M)	12.70	1/2	8.51	7.75	4.45	17.80	0.701	1.80	1.80	0.98	2.16	23.00	5169.79	/	/	*
520MX	520NZ	15.875	5/8	10.16	6.35	5.24	19.90	0.783	2.20	2.20	1.76	3.88	38.00	8539.74	/	*	*
525MX	525NZ	15.875	5/8	10.16	7.95	5.24	20.00	0.788	2.20	2.20	1.87	4.12	38.00	8539.74	/	*	*
530MX	530NZ (50NZ)	15.875	5/8	10.16	9.40	5.24	21.60	0.851	2.20	2.20	1.98	4.37	38.00	8539.74	/	*	*
630MX	630NZ	19.05	3/4	11.91	9.40	5.94	22.60	0.890	2.42	2.42	2.74	6.04	36.00	8090.77	/	*	*

UNIBear Super are extra reinforced chains. With Solid Bushing & Through-hardened Roller, Super Chains perform with excellent response to wear and elongation. UNIBear Super Chains are suitable for standard as well as racing applications whenever O-Ring chain is not required.

* Outer Plate Color Available: Golden Finished; Silver Finished

UNIBEAR® SLCC®

O-Ring

UNIBEAR CHAIN NO.	JAPAN CHAIN NO.	Pitch		Roller Dia.	Width between inner plates	Pin Dia	Pin Length		Plate Thickness inner	Plate Thickness outer	Weight 100L	Weight 100L	Tensile Strength		Seal Type	Connecting Link	
		mm	in	mm	mm	mm	mm	in	mm	mm	kgs	lbs	KN	Lbs	O/X	Rivet	Clip
O–RING																	
420UO	420V	12.70	1/2	7.77	6.35	3.96	19.00	0.749	1.80	1.80	0.93	2.05	19.60	4045.14	O	*	*
428UO	428V	12.70	1/2	8.51	7.94	4.45	21.20	0.835	2.03	2.03	1.23	2.71	24.20	4944.06	O	*	*
520UO	520V	15.875	5/8	10.16	6.40	5.24	20.80	0.820	2.20	2.20	1.86	4.10	39.60	8090.28	O	*	*
525UO	525V	15.875	5/8	10.16	7.95	5.24	22.30	0.879	2.20	2.20	1.96	4.32	39.60	8090.28	O	*	*
530UO	530(50)V	15.875	5/8	10.16	9.40	5.24	24.90	0.981	2.42	2.42	2.27	5.00	46.20	9438.66	O	*	*
630UO	630V	19.05	3/4	11.91	9.40	5.94	25.40	1.001	2.42	2.42	2.91	6.42	53.90	11011.77	O	*	*

MR/MRS

AR/ARS

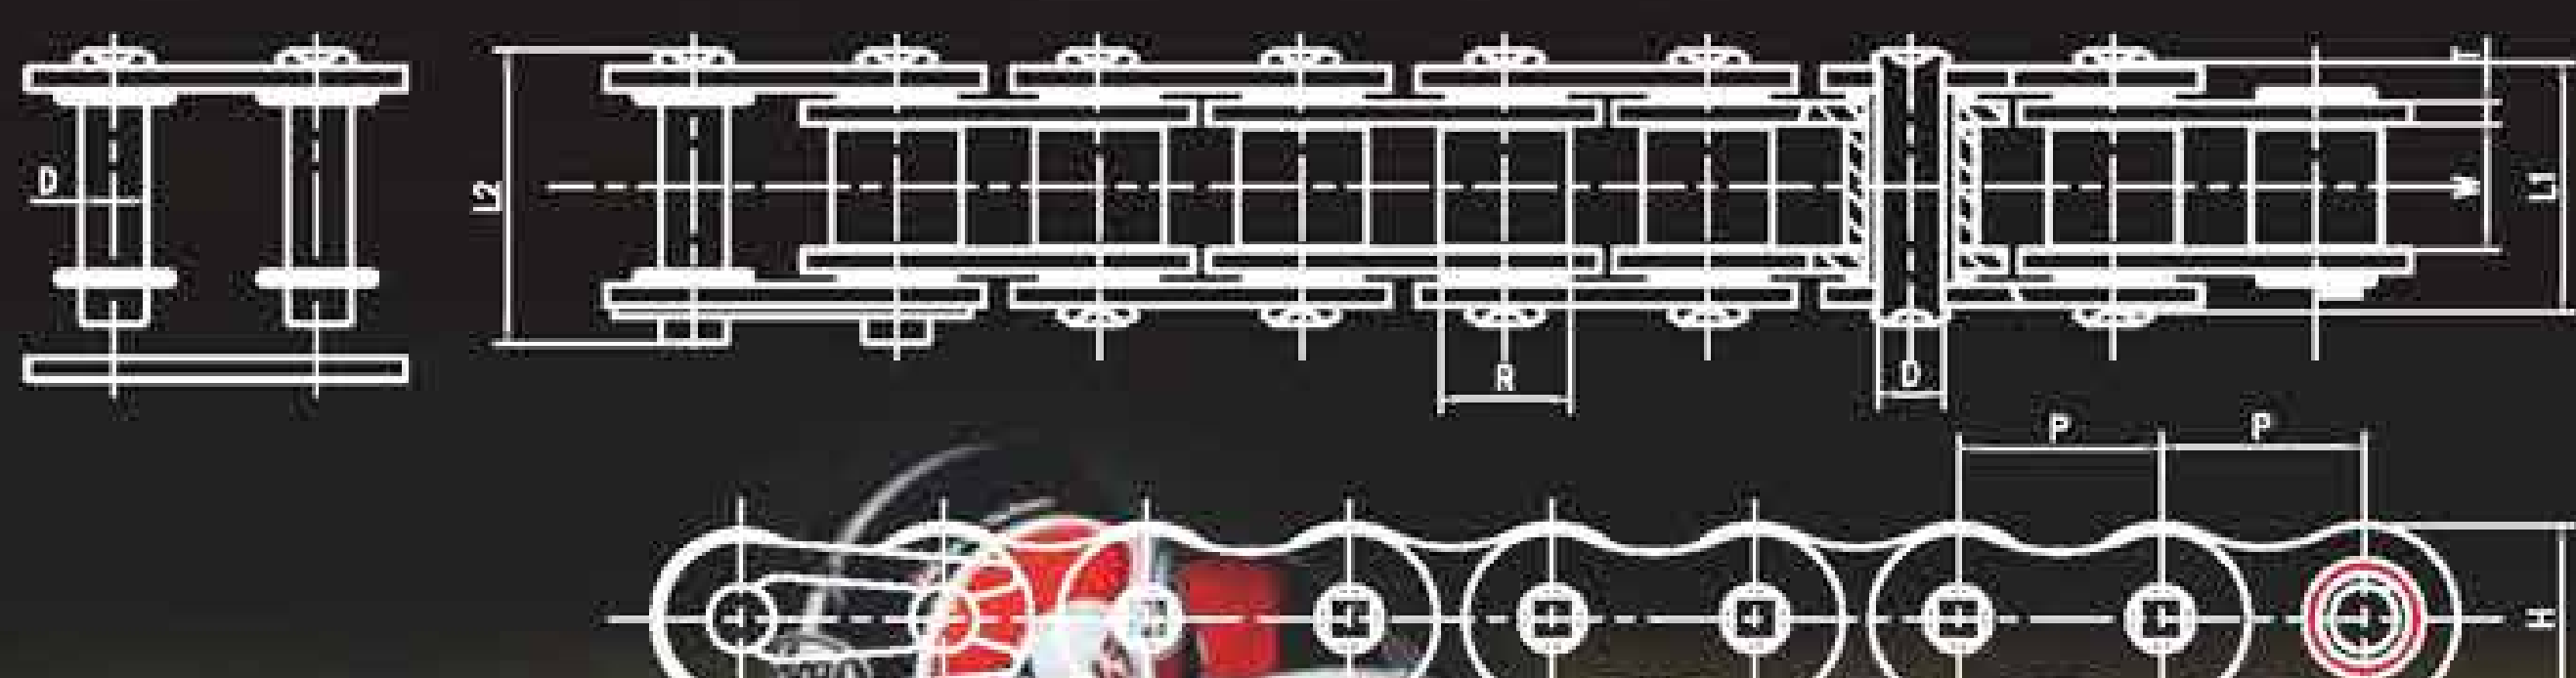

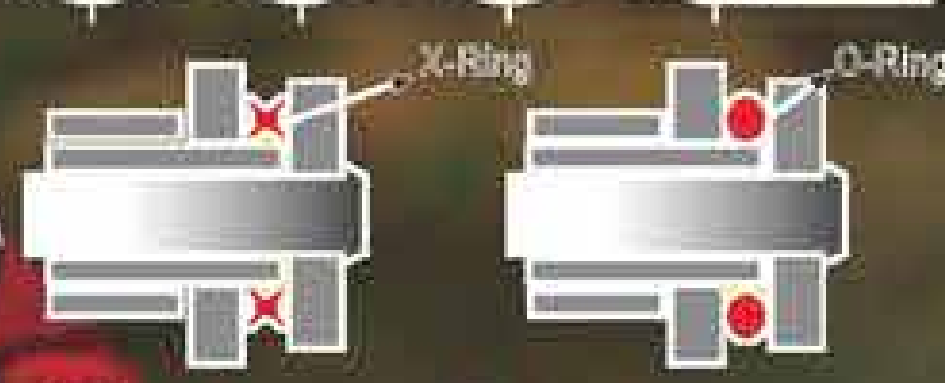

UNIBear O-Ring chain achieve permanent Lubrication Sealing between pin & bush which ensure with longer lifetime and minimun maintainance. With Solid Bushing, High Quality of Pin Material and 4-side riveting, UNIBear provide with both standard & reinforced O-Ring Chains. But UNIBear recommend reinforced O-Ring chains since it has even better performance which covers almost all the range of motorcycles.

- Outer Plate Color Available: Golden Finished; Silver Finished
- Painted Color Plate Available: Red, Yellow, Orange, Green, Blue

® SLCC®

ATV X-Ring

UNIBEAR CHAIN NO.	JAPAN CHAIN NO.	Pitch		Roller Dia.	Width between inner plates	Pin Dia	Pin Length		Plate Thickness inner	Plate Thickness outer	Weight 100L	Weight 100L	Tensile Strength		Seal Type	Connecting Link	
		mm	in	mm	mm	mm	mm	in	mm	mm	kgs	lbs	KN	Lbs	O/X	Rivet	Clip
X–RING																	
420UX	420VM	12.70	1/2	7.77	6.35	3.96	19.00	0.749	1.80	1.80	0.93	2.05	19.60	4045.14	X	*	*
428UX	428VM	12.70	1/2	8.51	7.94	4.45	21.20	0.835	2.03	2.03	1.23	2.71	24.20	4944.06	X	*	*
520UX	520VM	15.875	5/8	10.16	6.40	5.24	20.80	0.820	2.20	2.20	1.86	4.10	39.60	8090.28	X	*	*
525UX	525VM	15.875	5/8	10.16	7.95	5.24	22.30	0.879	2.20	2.20	1.96	4.32	39.60	8090.28	X	*	*
530UX	530VM	15.875	5/8	10.16	9.40	5.24	24.90	0.981	2.42	2.42	2.27	5.00	46.20	9438.66	X	*	*
630UX	630VM	19.05	3/4	11.91	9.40	5.94	28.60	1.127	3.25	3.25	2.91	6.42	53.90	11011.77	X	*	*

UNIBEAR Connecting Links Option

Clip Type:
Clip type connecting link with loose fit. Can be installed easily with pliers.

Rivet Type:
Rivet type connecting link is the most dependable connecting link. Special riveting tool is required for installation.

Pin Link:
Pin link could obtain the same riveting as other links of your chain. Special tooling is required for installation.

UNIBEAR Chain Cutting Tool

UNIBear Chain Cutting Tool is machined from best hardened steel and is designed to cut our chain pins when removing old chains. It's simple to use and easy to follow the instructions.

UNIBear X-Ring Chains are specially designed to be used on high powered as well as touring bikes. With a special 4-lips seal ring - X-Ring safely sealed lubrication inside the chain during its lifetime. With low frictional resistance, UNIBear X-Ring Chains operate much softer & cooler and, engaged better than traditional O-Ring chains. Also X-Ring increased the lifetime of the chain considerably as well.

UNIBear ATV Chains use low friction & long lifetime X-Ring and, its performance are good for all quad types.

- Outer Plate Color Available: Golden Finished; Silver Finished
- Painted Color Plate Available: Red, Yellow, Orange, Green, Blue

DOES YOUR CHAIN HAVE ALL THESE FEATURES?

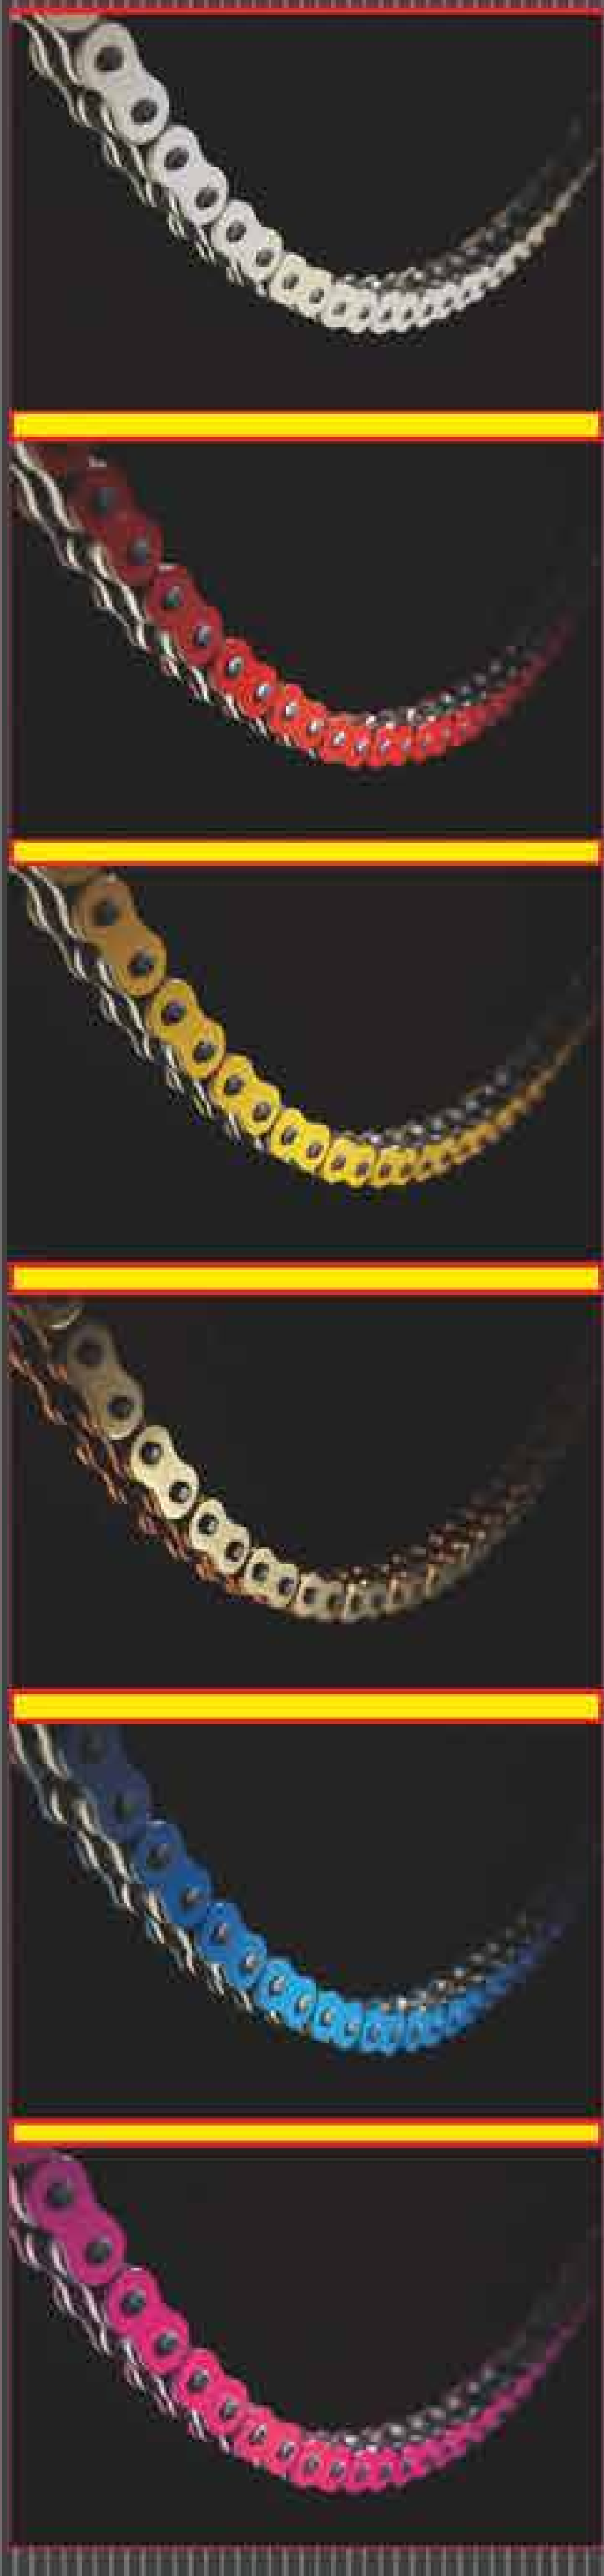

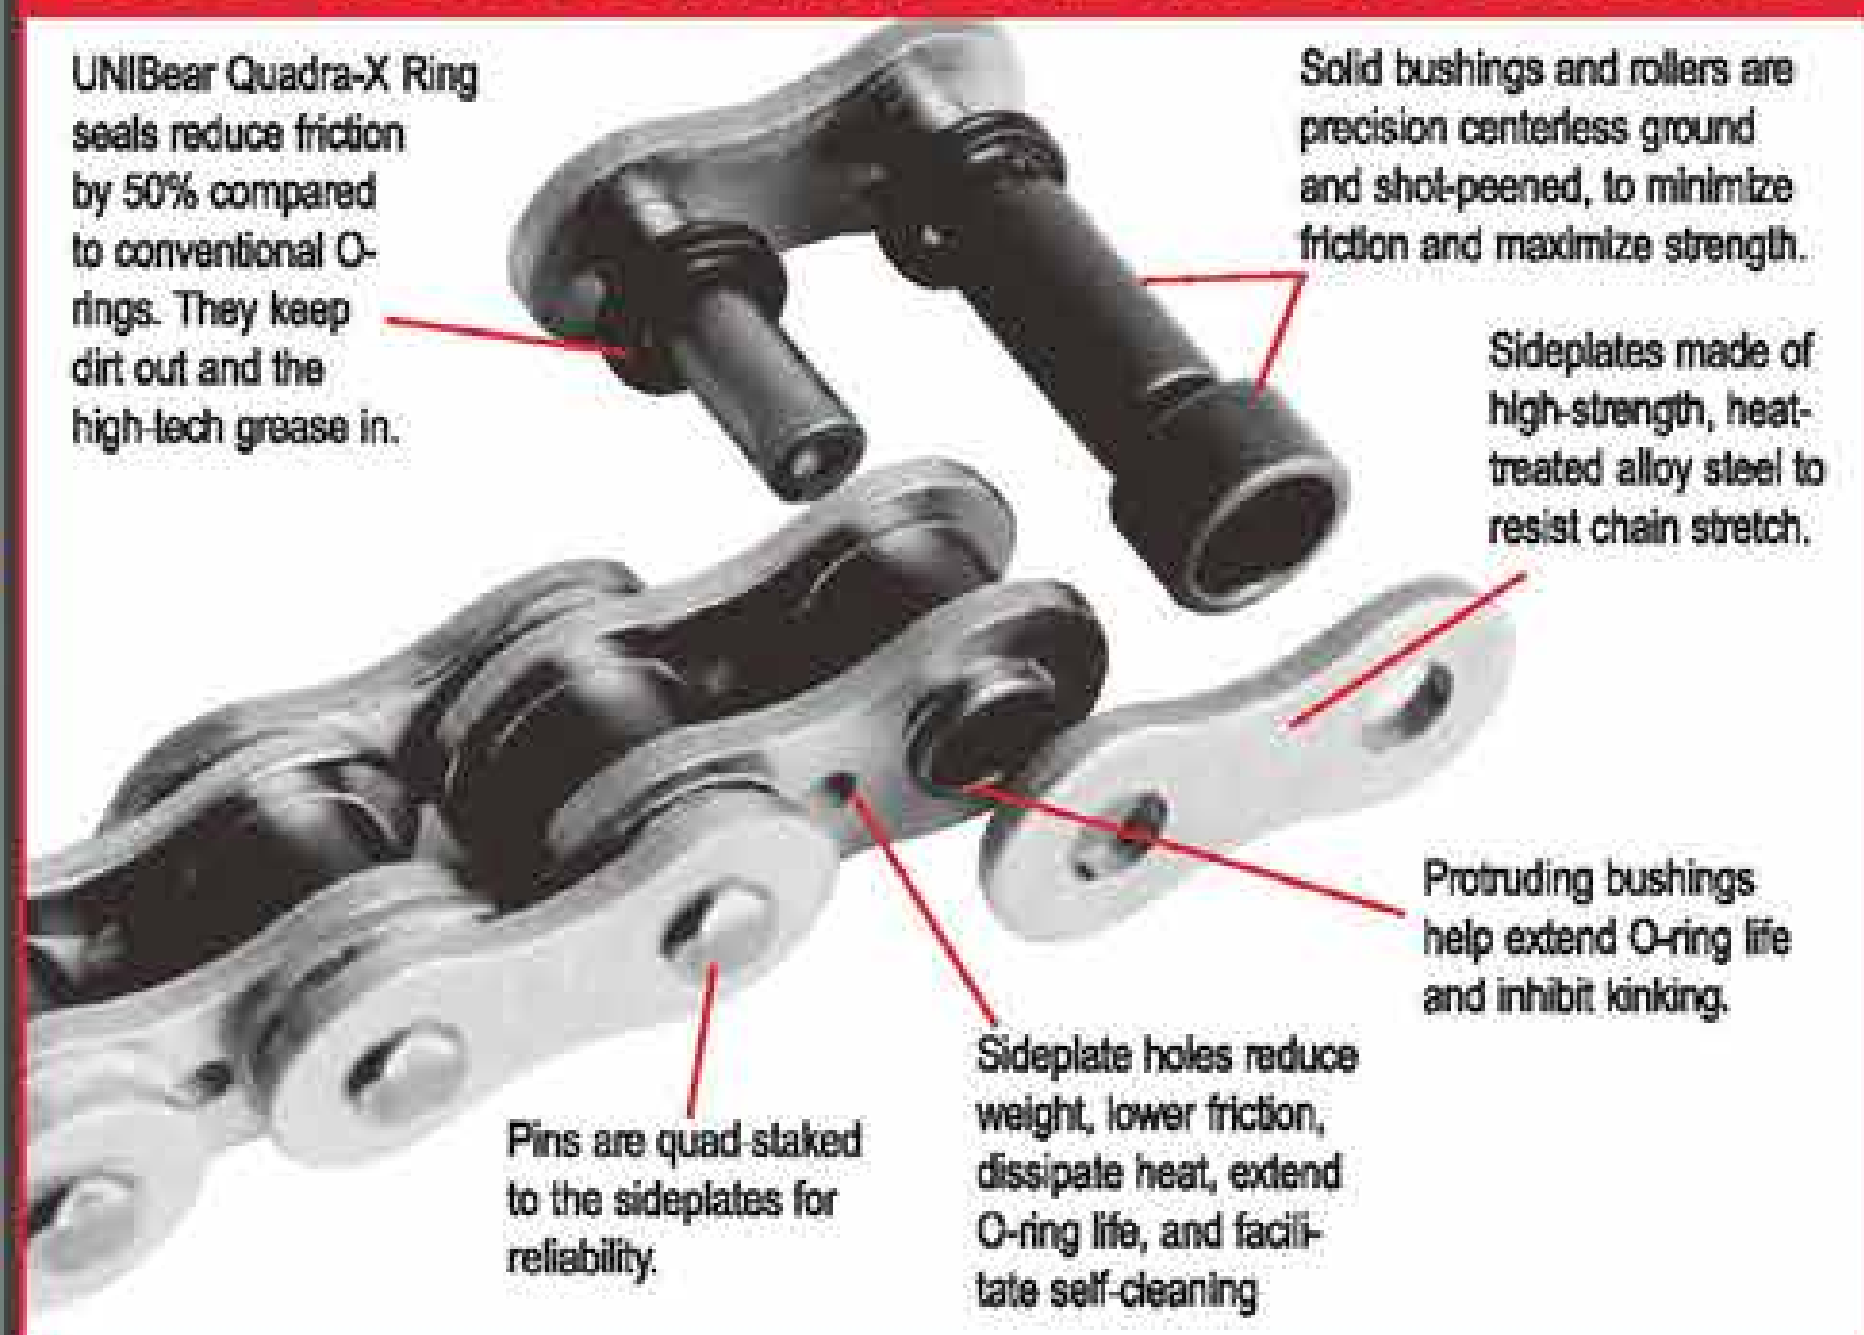

ZST ZERO STRETCH TECHNOLOGY

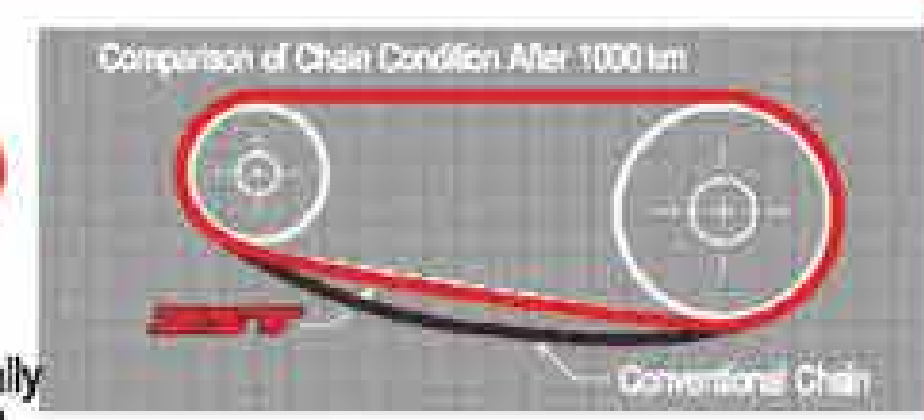

UNIBear Chains new Zero Stretch Technology virtually eliminates measurable chain stretch in the first 1000 km of use. ZST puts an end to the hassle of retensioning the chain after the initial break-in period, when most chain stretch occurs. For racers, this can mean going several race weekends without a single chain adjustment. You also get the confidence of knowing that a chain with ZST will stay within wear tolerances throughout its entire service life. ZST is standard on the 530 ZZZ chain, and available as an option on the 520 RXO chain and all MVXZ series chains.

UNIBear QUADRA-X RINGS VS. O-RINGS

No one knows more about sealed chains than UNIBear. After all, we invented the O-ring chain for motorcycles way back in 1995. Since then, we've improved on our invention with the revolutionary Quadra-X Ring seal. The Quadra-X Ring reduces friction by as much as 50 percent, thanks to its smaller contact area. Yet it offers even better sealing than a conventional O-ring, because it has twice as many contact points between the ring and sideplates. Its the optimal combination of maximum sealing protection with minimum friction.


Conventional O-ring


Quadra-X Ring

Many sealed chains are a trade-off: In the quest for low friction. the quality of the seal between the rings and sideplates is compromised. While such chains may offer lower friction initially. their loose tolerances ultimately lead to lubricant loss, premature wear, and increased friction in the long run. UNIBear Quadra-X Ring chains combine educed friction and long wear-lab tests show that they last 50 percent longer than standard O-ring chains.

UNIBear CHAIN LIMITED wARRANTY

UNIBear O-ring and Quadra-X Ring Chains are warranted against defects in materials and workmanship for 24 months/unlimited mileage(street use) or 12 months/unlimited mileage(off-road use).The warranty period begins on the date shown on the sales invoice or receipt. This warranty is void for any use other than those applications recommended by UNIBear Chain.This warranty does not cover the use of UNIBear Chains in competitive events,or on motorcycles that have been modified.

UNIBEAR® SLCC®

TIMING CHAIN

永利百合链号 UNIBear Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	内链板高度 Inner plate depth	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	疲劳强度 Fatige
	P	d_1 max	b_1 min	d_2 max	L max	h_2 max	Q min	Q_0	amx
	mm	mm	mm	mm	mm	mm	kn	kn	kgf
25	6.35	3.3	3.1	2.31	7.8	5.9	3.5	5.2	90
25H	6.35	3.3	3.18	2.31	9	5.9	4.8	5.2	100
25HX	6.35	3.3	3.18	2.31	9	5.9	6	6.5	100
25HD	6.35	3.3	3.18	2.31	9	5.9	6.2	6.8	100
219H	7.774	4.59	5	3.01	12	7.6	6.6	7.9	20
219SH	7.774	4.59	4.6	3.01	12.15	7.6	8.8	9.5	150
270H	8.5	5	4.75	3.58	13.3	8.45	9.8	12.5	180
06B	9.525	6.35	5.72	3.28	13.2	8.2	9	10.4	

可根据用户需要生产镀铜、镀锌、镀镍、镀铬链条

Copper-plated、zinc-plated、nickle-plated and chrome-plated chain available

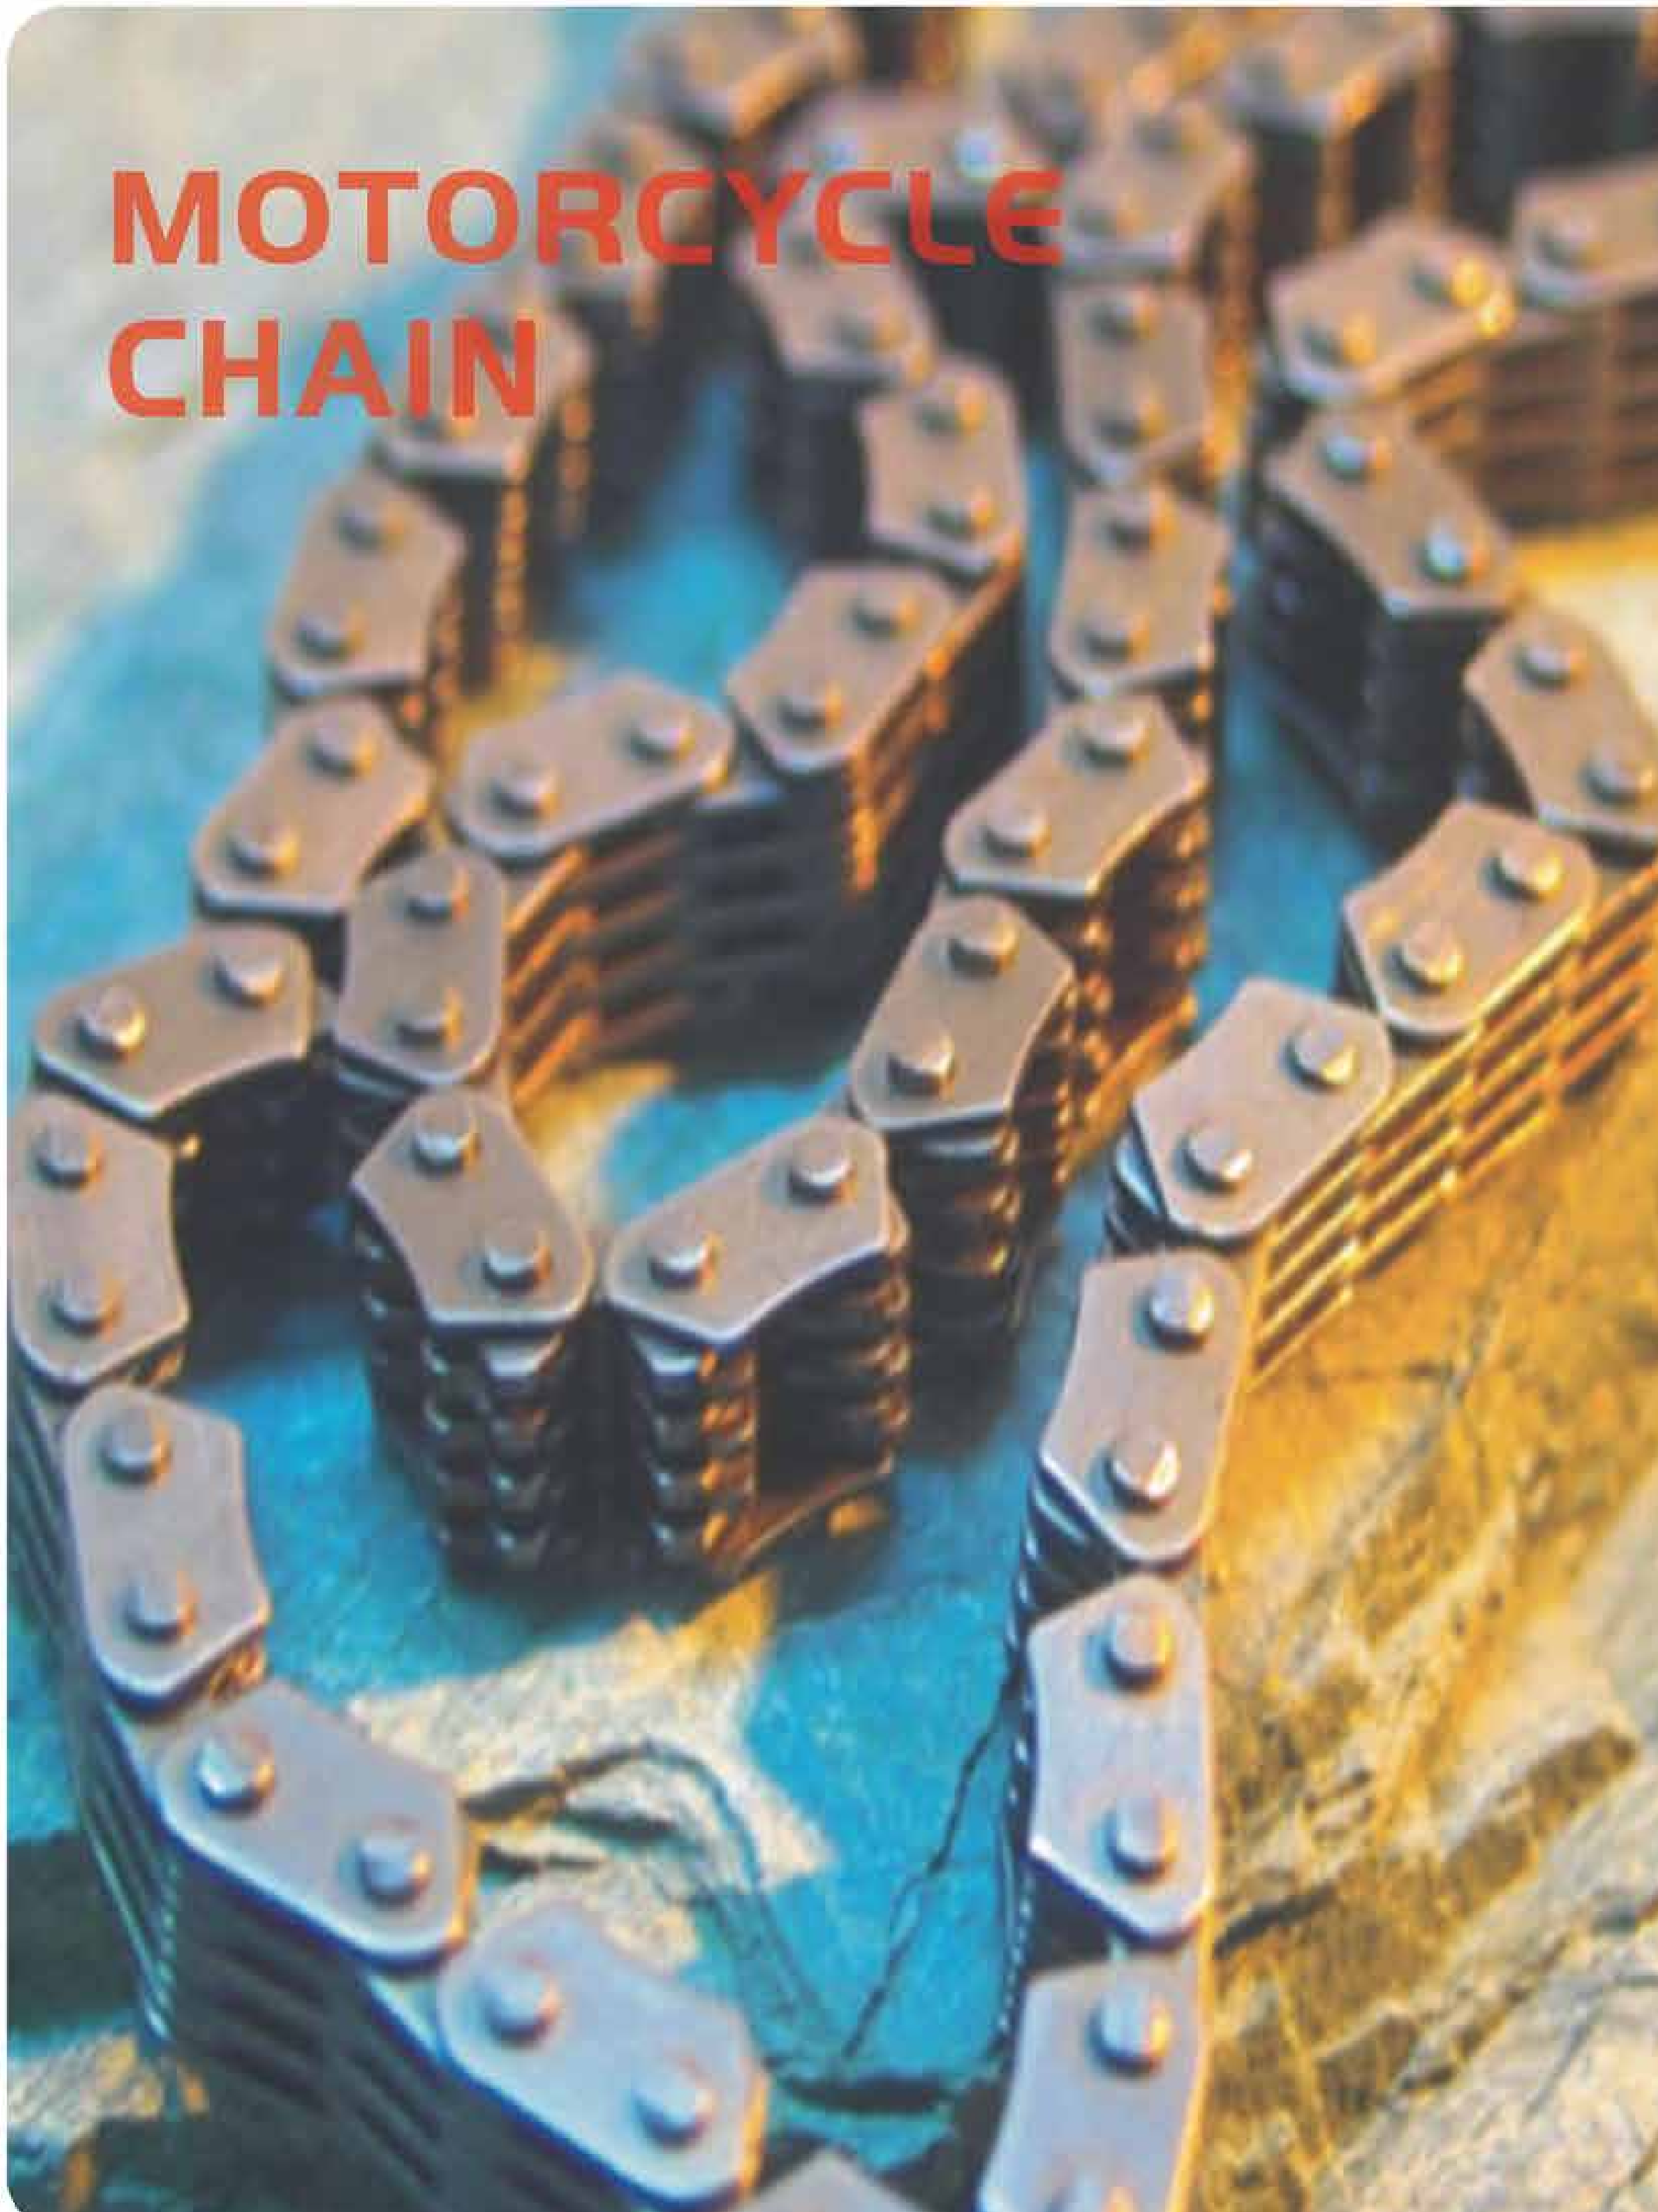

UNIBEAR® SLCC®

SILENT CHAIN

A型 TypeA

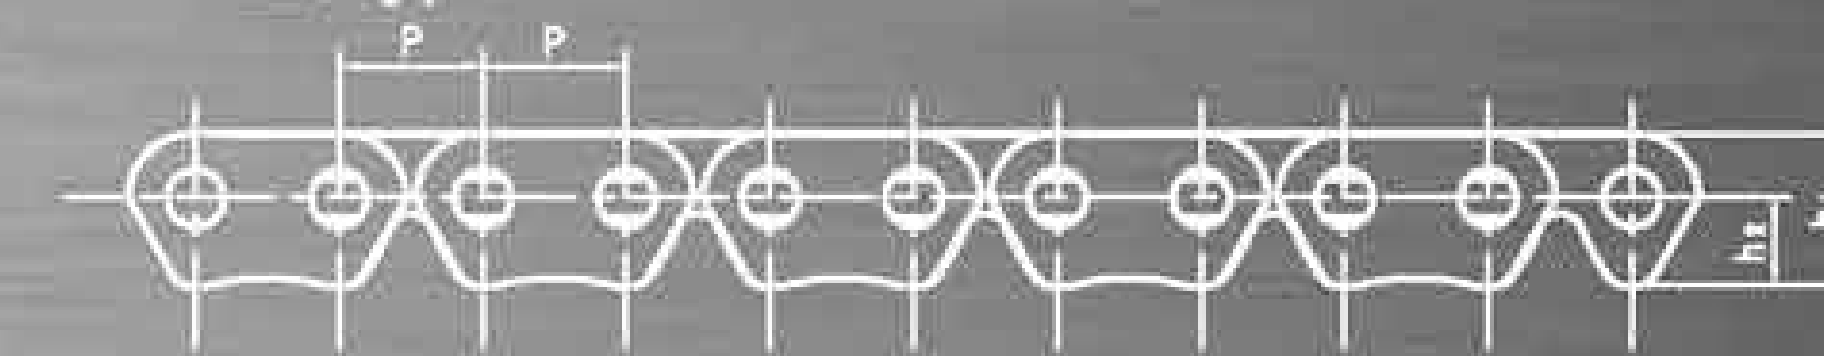

B型 TypeB

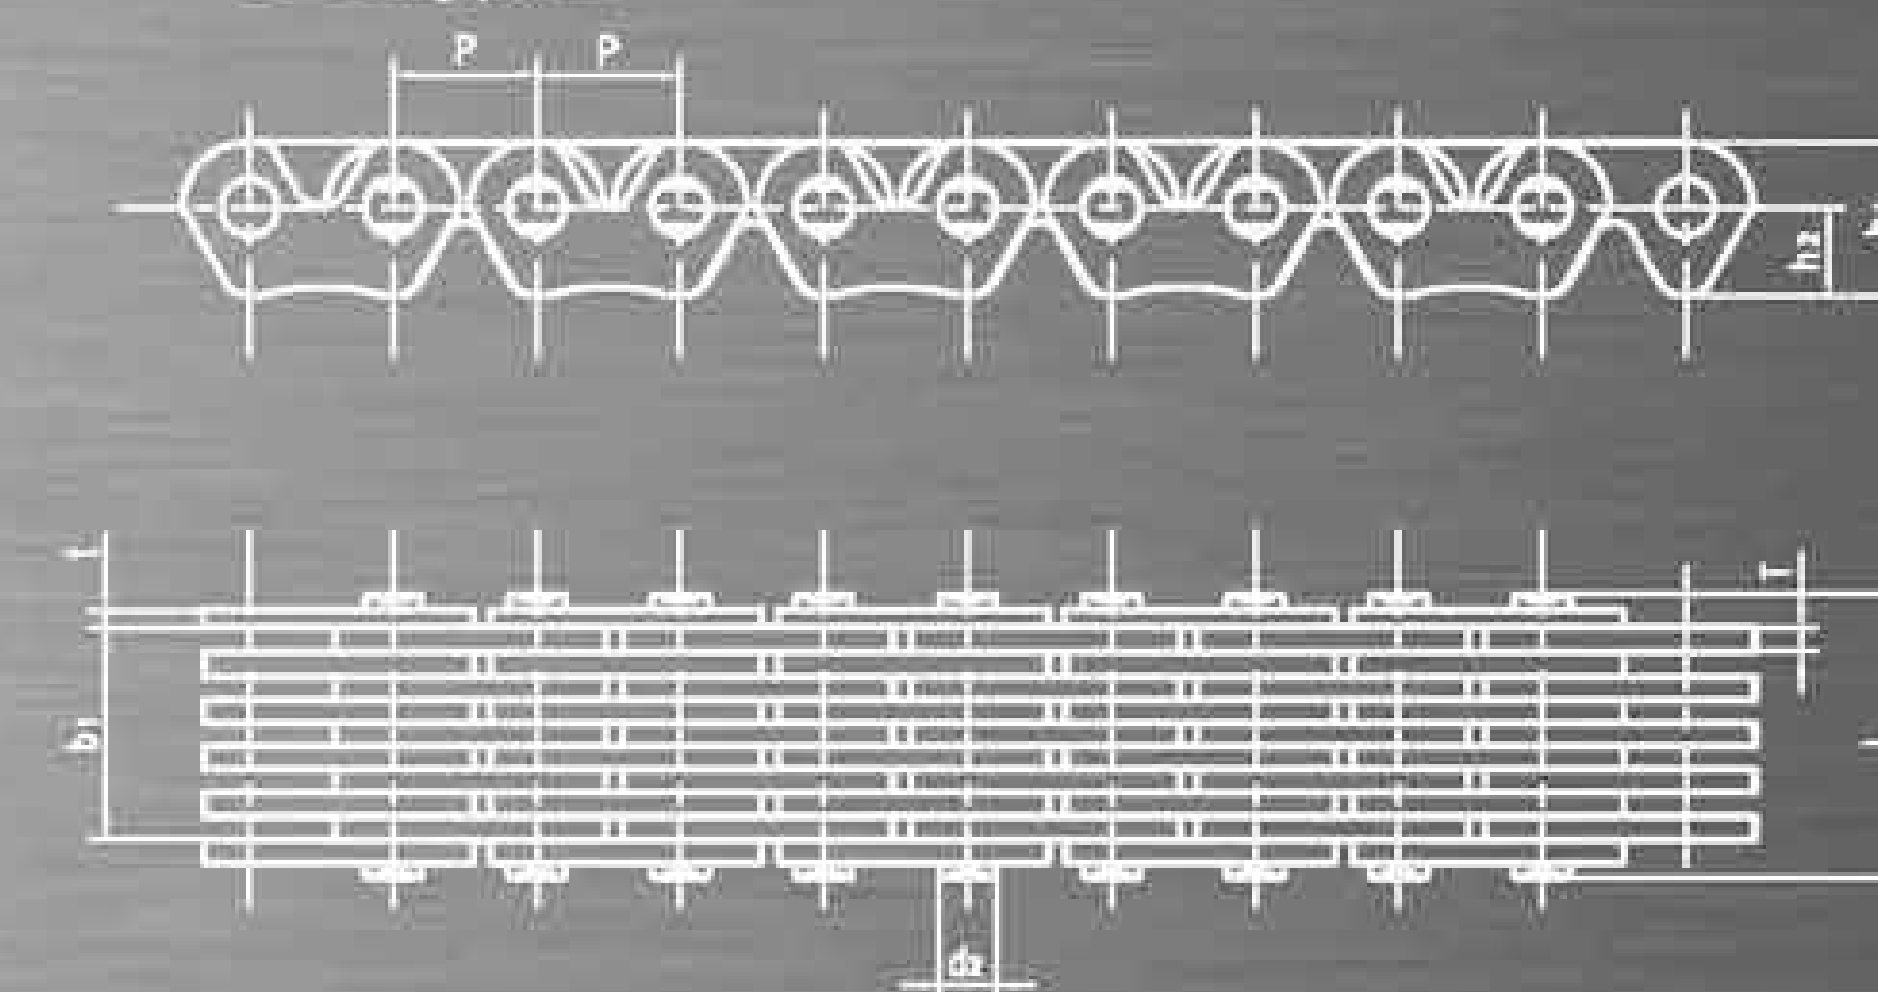

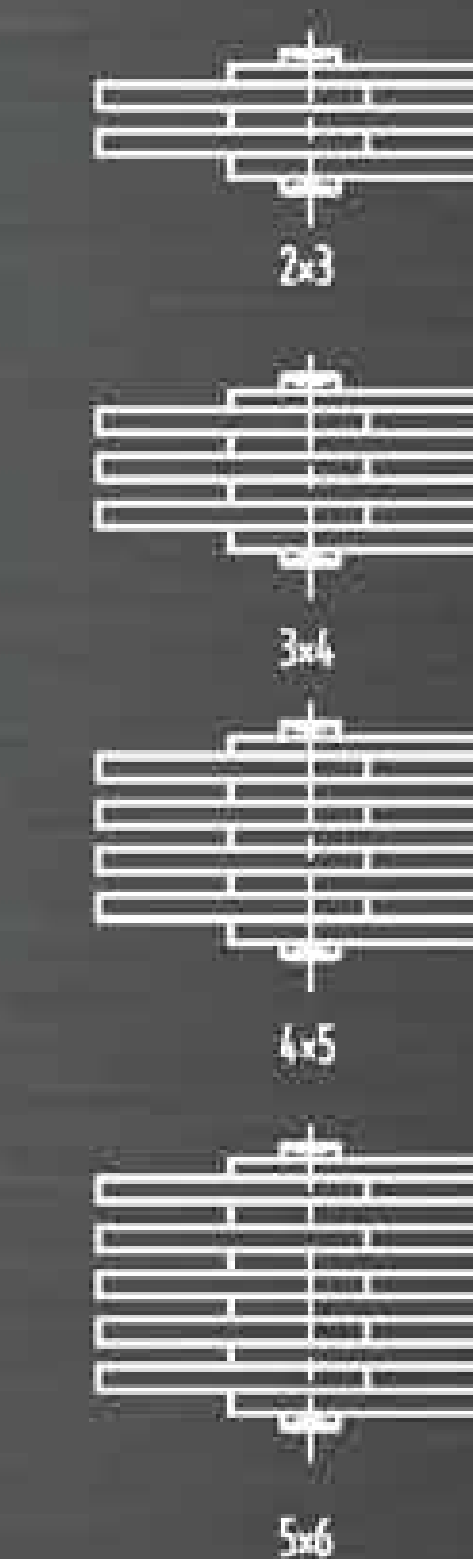

永利百合链号 UNIBear Chain No.		节距 Pitch	链宽 Chain Width	销轴直径 Pin diameter	销轴长度 Pin length	空到尖齿距离 Distance from hole centre to tooth	链板厚度 Plates thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	疲劳强度 Fatige
		P	b_1	d_2 max	L	h_1	T/t	Q min	Q_o	amx
		mm	mm	mm	mm	mm	mm	kn	kn	kgf
2023LW	404LW	6.35	3.15	2.5	6.3	3.9	0.8	5	5.5	100
2034LW	409LW	6.35	5.2	2.5	8.4	3.9	0.8	7.6	8.2	150
2045LW	412LW	6.35	7.2	2.5	10.6	3.9	0.8	9	10.5	210
2023LN	404LN	6.35	3.15	2.5	6.3	3.9	0.8	5.2	5.5	115
2034LN	409LN	6.35	5.2	2.5	8.4	3.9	0.8	7.6	8.2	170
2045LN	412LN	6.35	7.2	2.5	10.6	3.9	0.8	9	9.5	240

LN：齿啮型
LW：直板型
可根据用户需要生产镀铜、镀锌、镀镍、镀铬链条
Copper-plated, zinc-plated, nickle-plated and chrome-plated chain available

UNIBEAR
MOTORCYCLE SPROCKET KITS

Http://www. unibear .com

UNIBEAR® SLC®

TRANSMISSION KITS

产品编号 (item code)	型号(Model)		链条(Chain NO.)			链轮(Sprockets)	
			加强(Reinfored)	普通(Normal)	节数(Links)	大齿(Rear)	小齿(Front)
UN 001	本田125	CG125	428H	428	100L	38T	15T
UN 002	五羊A	WY125A	428H	428	108L	38T	15T
UN 003	五羊B	WY125C	428H	428	108L	39T	15T
UN 004	富先达125-38T(大孔)	FXD125-38T	428H	428	108L	38T	15T
UN 005	富先达125-39T(大孔)	FXD125-39T	428H	428	108L	39T	15T
UN 006	富先达125-41T(大孔)	FXD125-41T	428H	428	116L	41T	15T
UN 007	富先达125-43T(大孔)	FXD125-43T	428H	428	116L	43T	15T
UN 008	富先达125-46T(大孔)	FXD125-46T	428H	428	116L	46T	15T
UN 009	本田飞鹰	WIN100	428H	428	108L	41T	14T
UN 010	铃木	GS100	428H	428	112L	42T	14T
UN 011	铃木王125	GN125	428H	428	116L	43T	14T
UN 012	豪爵125	QJ125	428H	428	116L	42T	14T
UN 013	钱江125-38T(小孔)	QJ125	428H	428	116L	38T	15T
UN 014	钱江125-39T(小孔)	QJ125	428H	428	116L	39T	15T
UN 015	钱江125-42T(小孔)	QJ125	428H	428	116L	42T	15T
UN 016	钱江125-43T(小孔)	QJ125	428H	428	116L	43T	15T
UN 017	钱江125-38T(大孔)	QJ125	428H	428		38T	15T
UN 018	钱江125-41T(大孔)	QJ125	428H	428	116L	41T	15T
UN 019	钱江125-43T(大孔)	QJ125	428H	428	116L	43T	15T
UN 020	本田王	CB125	428H	428	122L	42T	15T
UN 021	嘉陵125-42T	JH125-42T	428H	428	112L	42T	15T
UN 022	嘉陵125-43T	JH125-43T	428H	428	112L	43T	15T
UN 023	嘉陵125-46T	JH125-46T	428H	428	112L	46T	15T
UN 024	Fb风暴150带阻	FBI150	428H	428	132L	42T	15T
UN 025	劲豹150	SRZ150	428H	428	132L	47T	15T
UN 026	嘉陵70	JH70	420		98L	41T	14T
UN 027	嘉陵90	JH90	420		100L	37T	14T
UN 028	太阳90	DY90	420		100L/102L	37T	14T
UN 029	太阳100	DY100	428H	428	100L	36TB	14T
UN 030	珠江125	ZJ125	428H	428	116L	139TA	15Ta
UN 031	珠江100	ZJ100	428H	428	100L	38T	14T
UN 032	捷达100	JD100	428H	428	108L	39T	14T
UN 033	捷达125-39T	JD125-39T	428H	428	116L	39T	15T
UN 034	捷达125-41T	JD125-41T	428H	428	112L	41T	15T
UN 035	捷达125-43T	JD125-43T	428H	428	116L	43T	15T
UN 036	捷达125-46T	JD125-46T	428H	428	116L	46T	15T
UN 037	珠江刀	ZJD	428H	428	116L	43T	15T
UN 038	风暴太子	FB150	428H	428	128L	42T含盖	15T
UN 039	钱江王	QJW	428H	428	116L	42T	15T
UN 040	豪爵-8（豪爵太子）	HJ125-8	428H	428	116L	42T	15T
UN 041	金城125	JC125	428H	428	122L	42T	15T
UN 042		QS110	428H	428	104L	35T	14T
UN 043		JY110	428H	428	108L	38T	15T
UN 044		JS110	428H	428	108L	36T	14T
UN 045	太阳100	DY110	428H	428	108L	38T	
UN 046	太阳100	DY100	428H	428	112L	41T	14T
UN 047		QJ125	428H	428	116L	45T	15T
UN 048	新大洲		428H	428	122L	46T	15T
UN 049	新大洲		428H	428	118L	43T	15T
UN 050	新大洲		428H	428	116L	41T	15T
UN 051		GT125	428H	428	116L	41T	14DY
UN 052		GT125	428H	428	116L	41T	14CG
UN 053		SY125	428H	428	116L	41T	15T
UN 054		JD125	428H	428	122L	45T	15T
UN 055		JYM	428H	428	122L	45T	14T

UNIBEAR® SLCC®

TRANSMISSION KITS FOR SOUTH AMERICA

产品编号 (Item code)	型号(Model)	链条(Chain NO.)			链轮(Sprockets)	
		加强(Reinforced)	普通(Normal)	节数(Links)	大齿(Rear)	小齿(Front)
UN 056	C 100DREAM	428H	428	98L	38T	14T
UN 057	C-100 BIZ	428H	428	108L	35T	15T
UN 058	C-125 BIZ	428H	428	108L	34T	14T
UN 059	POP 100	428H	428	108L	35T	14T
UN 060	WEB 100	428H	428	108L	36T	14T
UN 061	CBX 200	520H	520	104L	41T	13T
UN 062	CBX 250	520H	520	108L	38T	13T
UN 063	CBX 250 TWISTER	520H	520	108L	37T	13T
UN 064	HUNTER/MAX 100	428H	428	118L	39T	15T
UN 065	NX 150	428H	428	126L	48T	16T
UN 066	XR 200	520H	520	108L	43T	13T
UN 067	XR 250 TORNADO	520H	520	104L	38T	13T
UN 068	KATANA/YES 125	428H	428	116L	43T	14T
UN 069	TITAN/CG-125 99	428H	428	116L	43T	14T
UN 070	TITAN/CG-125 00	428H	428	116L	44T	14T
UN 071	TITAN/CG-150 04	428H	428	118L	43T	16T
UN 072	YBR-125 2000	428H	428	118L	43T	14T
UN 073	YBR-125	428H	428	118L	45T	14T
UN 074	FAZER 250	428H	428	132L	45T	15T
UN 075	NXR125 BROS	428H	428	132L	54T	17T
UN 076	NXR150 BROS	428H	428	130L	50T	17T
UN 077	MOBILETE	415H	415	104L	54T	11T
UN 078	XTZ 125	428H	428	128L	48T	14T
UN 079	XLS125	428H	428	124L	56T	14T
UN 080	XLR125	428H	428	126L	50T	16T
UN 081	CRYPTON 100	428H	428	98L	37T	15T
UN 082	AX100	428H	428	120L	42T	14T
UN 083	AX100	428H	428	108L	37T	14T
UN 084	FALCON 400	520H	520	108L	40T	15T
UN 085	RX100	428H	428	120L	39T	15T
UN 086	DR125	520H	520	104L	39T	12T
UN 087	XI125	428H	428	132L	46T	15T
UN 088	XI125	428H	428	132L	42T	15T
UN 089	XI125	428H	428	132L	37T	15T
UN 090	GN125	428H	428	120L	42T	15T
UN 091	CD110	428H	428	116L	38T	14T
UN 092	TVS	428H	428	112L	42T	14T
UN 093	BAJAJ	428H	428	114L	42T	14T

UNIBEAR® SLCC®

O/X-RING CHAIN FOR SOUTH AMERICA

产品编号 (Item code)	型号(Model)	链条(Chain NO.)		节数(Links)
UN 094	Honda C-100 Dream	428UX	428UO	98L
UN 095	Yamaha Crypton 100	428UX	428UO	98L
UN 096	Honda C-100 Biz/Sundown Hunter-125	428UX	428UO	108L
UN 097	Honda CG/ML/Turuna-125'83	428UX	428UO	110L
UN 098	Honda CG/Today/Titan-125 Suzuki EN/Katana-125	428UX	428UO	116L
UN 099	Yamaha RD-135/RDZ-125/YBR-125 Honda CG-150	428UX	428UO	118L
UN 100	Yamaha RD-180/XT-225/TDM-225/RD/RDZ-135	428UX	428UO	120L
UN 101	Honda CBX Aero	428UX	428UO	122L
UN 102	Honda XL-125	428UX	428UO	124L
UN 103	Honda NX/CBX-150/XL/XLR-125 Agrale SXT-Yamaha-125	428UX	428UO	126L
UN 104	Yamaha XTZ-250-Lander	428UX	428UO	128L
UN 105	Honda NXR-150 Bros	428UX	428UO	130L
UN 106	Honda NXR-125 Bros/Yamaha YS250 Fazer	428UX	428UO	132L
UN 107	Honda NX-350 Sahara	520UX	520U0	98L
UN 108	Honda NX-400/NX/XLX-350 Suzuki GM-250 Yamaha DT-200	520UX	520U0	100L
UN 109	Honda XL/XLX-250/XR-200/NX-250/CB-400/Yamaha DT-200R Agrale Daker	520UX	520U0	102L
UN 110	Honda CBX 200 Strada/NX 200/XR250 Tornado/Yamaha Tenere-600-84-88	520UX	520U0	104L
UN 111	Honda XR-200	520UX	520U0	108L
UN 112	Honda CR-125/CR-250	520UX	520U0	110L
UN 113	Suzuki GS-500	520UX	520U0	112L
UN 114	Honda Virag0-250/Suzuki Intruder-250	520UX	520U0	114L
UN 115	Honda VT-600 Shadow	525UX	525U0	100L
UN 116	Honda CB-500'03	525UX	525U0	108L
UN 117		525UX	525U0	110L
UN 118	Honda CB-400/CB-600 HORNET	525UX	525U0	120L
UN 119	Honda CB-500/CBR-450 Shadow	530UX	530U0	102L
UN 120	Honda CB-400/450	530UX	530U0	110L
UN 121	Suzuki GS-500			

可根据用户需要生产镀铜、镀锌、镀镍、镀铬链条
Copper-plated, zinc-plated, nickle-plated and chrome-plated chain available

UNIBEAR® SLCC®

TIMING CHAIN FOR SOUTH AMERICA

产品编号 (item code)	型号(Model)	链条(Chain NO.)		节数(Links)
UN 122	Honda Biz/C-100 Dream	25H		84L
UN 123	Yamaha YBR-125 XTZ	25H		88L
UN 124	Honda ML/XL-250 Suzuki–125 Katana/Intruder/Yamaha Cryton/XLS/Turuna	25H		98L
UN 125	Yamaha TDM-225/XT-225	25H		104L
UN 126	YBR125/XTZ125	2023LW	404LW	90L
UN 127	Biz125	2023LW	404LW	92L
UN 128	Honda CG-150(TITAN150)	2023LN	404LN	94L
UN 129	DaeliNG Altino-100	2023LW	404LW	96L
UN 130	Honda NX/CBX150 Aero/NXR-150 Bros/ En150 YES	2023LW	404LW	100L
UN 131	Honda NX/CBX 200 Strada/Strada/ XR-200	2023LW	409LW	102L
UN 132	Fazer 250/Lander 250	2023LW	409LW	104L
UN 133	Kasinski Midas FX	2023LW	409LW	92L
UN 134	Kasinski RX/GF/Cruise–125	2034LN	409LN	98L
UN 135	Kasinski Cruise 125i	2024LN	409LN	100L
UN 136	Honda Nx4 Falcon,kasinski Midas-110/NX400 Falcon	2024LN	409LN	112L
UN 137	Shadow 600	2024LN	409LN	118L
UN 138	Kasinski Midas 250	2024LN	409LN	124L
UN 139	Honda XR/Tornado/CBX/Twister-250 kasinski Midas-250	2034LN	409LN	126L
UN 140	Honda CBX-150	2045LW	412LW	100L
UN 141	Honda CBX-200/NX200	2045LW	412LW	102L
UN 142	Honda XLR-250	2045LW	412LW	104L
UN 143	Honda XLR-250/XLX/NX/Sahara-350	2045LW	412LW	108L
UN 144	Honda CB-400/450	2045LW	412LW	110L
UN 145	Intruder 250	2045LW	412LW	112L
UN 146	CBR 900	2045LW	412LW	116L
UN 147	Tenere	2045LW	412LW	126L
UN 148	Honda CB-500	2045LW	412LW	130L
UN 149	XTZ 750	2045LW	412LW	138L
UN 150				

LN：弯板型
LW：直板型
可根据用户需要生产镀铜、镀锌、镀镍、镀铬链条
Copper-plated、zinc-plated、nickle-plated and chrome-plated chain available

UNIBEAR® SLCC®

MOTORCYCLE CHAIN FOR SOUTH AMERICA

产品编号 (item code)	型号(Model)	链条(Chain NO.)		节数(Links)
UN 151	CALOI MOBILETTE/Ciclomotor	415	415H	104L
UN 152	HONDA C-100 DREAM	428	428H	98L
UN 153	YAMAHA CRYPTON 100	428	428H	98L
UN 154	HONDA C-125 DREAM	428	428H	100L
UN 155	HONDA CG, ML-125 & YAMAHA TT125,RX125	428	428H	102L
UN 156	HONDA C 125 BIZ	428	428H	108L
UN 157	HONDA C 100 BIZ	428	428H	108L
UN 158	HONDA CG, ML-125, TURUNA 1983	428	428H	110L
UN 159	HONDA CARGO, TODAY, TITAN 125 - SUZUKI KATANA 125	428	428H	116L
UN 160	HONDA CG 150, YAMAHA RD, RDZ 125, YBR 125	428	428H	118L
UN 161	YAMAHA RD, RDZ 125, DT, DTN-180, XT-225	428	428H	120L
UN 162	HONDA CBX 150 Aero	428	428H	122L
UN 163	HONDA XL 125S	428	428H	124L
UN 164	HONDA NX 150, CBX 150, XLR 125, XL 125	428	428H	128L
UN 165	HONDA NX 125 BROSS	428	428H	130L
UN 166	HONDA NX–150 BROSS	428	428H	132L
UN 167	CBX 250 STRADA	428	428H	134L
UN 168	HONDA NX 350/400 FALCON & YAMAHA Dt200	520	520H	100L
UN 169	HONDA XL, XLX 250, XR 200 - YAMAHA DT 200R	520	520H	102L
UN 170	HONDA CBX, NX 200 - YAMAHA TENERE 600	520	520H	104L
UN 171	HONDA CBX250 TWISTER, XR 250 TORNADO, YAMAHA RD 350, XT 600	520	520H	106L
UN 172	HONDA XR, NX 200	520	520H	108L
UN 173	CR 125/250/GS 500	520	520H	110L
UN 174	RM 250	520	520H	112L
UN 175	YAMAHA VIRAGO 250	520	520H	114L
UN 176	MOTOCICLETA COMPETIO	520	520H	116L
UN 177	HONDA SHADOW 600	525	525H	100L
UN 178	HONDA CB 500	525	525H	120L
UN 179	HONDA CB 400, CBX 450	530	530H	102L
UN 180	HONDA CB 750 FOUR	530	530H	106L
UN 181	HONDA CBR 600F	530	530H	108L
UN 182	SUZUKI GS 500	530	530H	110L
UN 183	HONDA CBX 750, CBR 1000	530	530H	114L

可根据用户需要生产镀铜、镀锌、镀镍、镀铬链条
Copper-plated、zinc-plated、nickle-plated and chrome-plated chain available

UNIBEAR® SLCC®

CHAIN KITS FOR MALAYSIA

马来西亚市场套链型号 Chain kits for Malaysia

产品编号 (item code)	型号(Model)	链条(Chain NO.)			链轮(Sprockets)	
		加强(Reinforced)	普通(Normal)	节数(Links)	大齿(rear)	小齿(front)
UN 184	EX-5	428H	428	96L	36T	14T
UN 185	WAVE	428H	428	104L	35T	14T
UN 186	WAVE R	428H	428	106L	36T	14T
UN 187	WAVE 100	428H	428	100L	36T	14T
UN 188	WAVE 125	428H	428	108L	36T	14T
UN 189	Y100	428H	428	100L	38T	14T
UN 190	RXZ(1)	428H	428	120L	38T	15T
UN 191	RXZ(2)	428H	428	120L	39T	15T
UN 192	LC135	428H	428	112L	39T	15T
UN 193	SMASH	428H	428	102L	36T	14T
UN 194	RC	428H	428	102L	36T	14T
UN 195	RG	428H	428	128L	38T	14T
UN 196	LEGENDA	428H	428	104L	36T	15T
UN 197	TZM	428H	428	132L	47T	16T
UN 198	KLISS 1	428H	428	108L	38T	14T
UN 199	MODENAS KLISS 1	428H	428	108L	40T	14T
UN 200	CD70	420H	420	100L	36T	14T
UN 201	DREAM	428H	428	100L	36T	14T
UN 202	TUKTUK	428H	428	112L	43T	13T

CHAIN KITS FOR AFRICA

非洲市场套链型号 Chain kits for Africa

产品编号 (item code)	型号(Model)	链条(Chain NO.)			链轮(Sprockets)
		加强(Reinforced)	普通(Normal)	节数(Links)	
UN 203	KB100	428H	428	112	13T*42T
UN 204	KB4S	428H	428	112	13T*44T
UN 205	TVS SAMURAI	428H	428	112	13T*41T
UN 206	HERO GONDA GN5	428H	428	106	14T*44T
UN 207	HERO GONDA GN5	428H	428	112	14T*44T
UN 208	AX100	428H	428	112	14T*42T
UN 209	CD80	420H	420	100	14T*39T
UN 210	CG125	428H	428	100	15T*38T
UN 211	RX115	428H	428	108	15T*38T
UN 212	CD70CDI	420H	420	104	14T*41T
UN 213	YB100	420H	420	100	15T*37T
UN 214	CD70F	420H	420	100	14T*41T
UN 215	CBZ	428H	428	112	14T*46T
UN 216	KB4S	428H	428	112	13T*44T
UN 217	KB100	428H	428	112	13T*42T
UN 218	RX115	428H	428	108	15T*38T
UN 219	AX100	428H	428	112	14T*42T
UN 220	H100S	428H	428	106	14T*35T
UN 221	CG125	428H	428	108	15T*38T
UN 222	CD80	420H	420	100	14T*39T
UN 223	HERO HONDA	428H	428	112	14T*44T
UN 224	YB100	420H	420	100	15T*37T
UN 225	RS125	428H	428	110	15T*35T
UN 226	KMW4冲程	428H	428	100	14T*35T
UN 227	KMW2冲程	428H	428	100	14T*35T
UN 228	CD70F	420H	420	104	14T*41T
UN 229	YB100	420H	420	100	15T*37T
UN 230	A80	420H	420	106	14T*35T

UNIBEAR® SLCC®

CHAIN KITS FOR INDONESIA

印尼市场套链型号

产品编号 (item code)	型号(Model)	链条(Chain NO.)			链轮(Sprockets)	
		加强(Reinforced)	普通(Normal)	节数(Links)	大齿(rear)	小齿(front)
UN 231	TIGER	520H	520	106	43T	13T
UN 232	KARISMA	428H	428	104	35T	14T
UN 233	GRAND	428H	428	100	36T	14T
UN 234	SUPRA FIT NEW	428H	428	106	36T	14T
UN 235	SUPRA X	428H	428	104	35T	14T
UN 236	SUPRA X125	428H	428	104	40T	15T
UN 237	SHOGUN 125	428H	428	102	35T	14T
UN 238	SHOGUN SP	428H	428	100	35T	14T
UN 239	SMASH NEW	428H	428	100	35T	14T
UN 240	SMASH NEW	428H	428	104	36T	14T
UN 241	SATRIA	428H	428	128	43T	14T
UN 242	SATRIA FU150	428H	428	120	43T	14T
UN 243	THUNDER 125	428H	428	120	45T	14T
UN 244	RXK NEW	428H	428	110	37T	14T
UN 245	RXS	428H	428	110	37T	15T
UN 246	WIN	428H	428	110	40T	14T
UN 247	FORCE 1	428H	428	100	39T	14T
UN 248	VEGA ZR	420H	420	108	40T	15T
UN 249	VEGA-R NEW	428H	428	104	35T	15T
UN 250	JUPITER Z	428H	428	104	36T	15T
UN 251	JUPITER MX	428H	428	112	39T	15T
UN 252	SCORPIO Z	428H	428	120	44T	15T
UN 253	BLADE	428H	428	104	36T	14T
UN 254	BLITE	428H	428	104	36T	14T
UN 255	MEGA PRO	428H	428	112	46T	14T
UN 256	GLPRO	428H	428	110	45T	15T
UN 257	NINJA	428H	428	122	42T	14T
UN 258	V-LXION	428H	428	120	42T	14T
UN 259	NINJA RR	520H	520	104	39T	14T
UN 260	ZX 130	428H	428	108	42T	14T
UN 261	GL 100	428H	428	100	38T	15T
UN 262	KAZE NEW	428H	428	110	42T	14T
UN 263	PRO NEOTECH	428H	428	112	46T	14T
UN 264	CRYPTON/VEGA	428H	428	100	37T	15T
UN 265	GLPRO NEOTECH	428H	428	112	46T	14T
UN 266	BLADE	428H	428	102	37T	14T
UN 267	REVO ABSOLUTE CS1	428H	428	116	42T	14T

CHAIN KITS FOR BURMA

缅甸市场套链型号 Chain kits for Burma

产品编号 (item code)	型号(Model)	链条(Chain NO.)			链轮(Sprockets)	
		加强(Reinforced)	普通(Normal)	节数(Links)	大齿(rear)	小齿(front)
UN 268	C90	420H	420	100L	39T	15T
UN 269	W110 (DY100)	428H	428	104L	36T	14T
UN 270		428H	428	106L	36T	14T
UN 271	W125A (DY100) 大孔、小孔	428H	428	108L	38T	14T
UN 272		428H	428	108L	41T	13T
UN 273	W125A (DY100)	428H	428	108L	44T	13T
UN 274		428H	428	108L	46T	13T

可提供用户需要生产镀铜、镀锌、镀镍、镀铬链条

Copper-plated, zinc-plated, nickle-plated and chrome-plated chain available

UNIBEAR® SLCC®

CHAIN KITS FOR PAKISTAN

巴基斯坦市场套链型号 Chain kits for Pakistan						
产品编号 (Item code)	型号(Model)	链条(Chain NO.)			链轮(Sprockets)	
		加强(Reinfored)	普通(Normal)	节数(Links)	大齿(rear)	小齿(front)
UN 275	C50Z	420H	420	100L	36T	14T
UN 276	CD70/CDI	420H	420	104L	41T	14T
UN 277	CD70F	420H	420	100L	41T	14T
UN 278	CG125	428H	428	100L	38T	15T
UN 279	CG125DX	428H	428	108L	38T	14T
UN 280	CG125 NEW	428H	428	108L	38T	15T
UN 281	CD185	428H	428	112L	34T	15T
UN 282	YB100	420H	420	100L	37T	15T
UN 283	YD100	420H	420	102L	37T	14T(15T)
UN 284	SOHRAB-1/W	420H	420	100L	37T	14T
UN 285	SOHRAB-1/S	420H	420	100L	37T	14T
UN 286	SOHRAB	420H	420	104L	37T	14T
UN 287	SD110	428H	428	104L	37T	15T
UN 288	CD100	428H	428	108L	43T	14T
UN 289	CG125 伊朗	428H	428	102L	38T	15T

CHAIN KITS FOR CAMBODIA

柬埔寨市场套链型号 Chain kits for Cambodia						
产品编号 (Item code)	型号(Model)	链条(Chain NO.)			链轮(Sprockets)	
		加强(Reinfored)	普通(Normal)	节数(Links)	大齿(rear)	小齿(front)
UN 290	C700	420H	420	100L	36T	14T
UN 291	DREAM	428H	428	100L	36T	14T
UN 292	SMASH	428	428	100L	36T	14T
UN 293	VIVA	428H	428	100L	36T	14T
UN 294	WAVE 2004	428	428	104L	35T	14T
柬埔寨市场链条型号 Chain kits for Cambodia						
UN 295		25H		82L		
UN 296		25H		84L		
UN 297		25H		88L		
UN 298		25H		90L		
UN 299		2023LW	404LW	88L		
UN 300		2023LW	404LW	90L		
UN 301		2023LW	404LW	92L		
UN 302		2034LW	409LW	94L		
UN 303		2034LW	409LW	98L		
UN 304		2045LW	412LW	104L		
UN 305		420H	420	88L		
UN 306		420H	420	100L		
UN 307		420H	420	104L		
UN 308		428H	428	100L		
UN 309		428H	428	104L		
UN 310		428H	428	106L		
UN 311		428H	428	108L		
UN 312		428H	428	112L		
UN 313		428H	428	120L		
UN 314		520H	520	110		

可根据用户需要生产镀铜、镀锌、镀镍、镀铬链条

Copper-plated, zinc-plated, nickle-plated and chrome-plated chain available

UNIBEAR® SLCC®

CHAIN KITS FOR INDIA

永利百合印度市场套链型号Unibear Chain Kit for India						
产品编号（item code）	型号(Model)	链条(Chain NO.)			链轮(Sprockets)	
		加强(Reinfored)	普通(Normal)	节数(Links)	大齿(rear)	小齿(front)
UN317	100CC					
UN318	BAJAJ KB100	428H	428	112L	42T	13T
UN319	BAJAJ KB 4S/BOXER	428H	428	112L	44T	13T
UN320	BAJAJ BYK	428H	428	102L	44T	13T
UN321	BAJAJ CALIBER	428H	428	116L	44T	13T
UN322	BAJAJ CALIBER CROMA	428H	428	116L	44T	13T
UN323	BAJAJ BOXER AR CT/CT-100	428H	428	114L	47T	13T
UN324	BAJAJ NEW CT-100	428H	428	112L	42T	14T
UN325	BAJAJ PLATINA	428H	428	118L	42T	14T
UN326	HERO HONDA CD100	428H	428	106L	44T	14T
UN327	HERO HONDA PASSION	428H	428	108L	44T	14T
UN328	HERO HONDA PASSION PLUS NEW	428H	428	108L	44T	14T
UN329	HERO HONDA STREET	428H	428	100L	36T	14T
UN330	HERO HONDA JOY	428H	428	106L	42T	14T
UN331	HERO HONDA SPLENDOR(108)	428H	428	108L	45T	14T
UN332	HERO HONDA SPLENDOR Y2k	428H	428	106L	43T	14T
UN333	HERO HONDA SPLENDOR PLUS	428H	428	106L	43T	14T
UN334	TVS SUZUKI AX 100	428H	428	112L	41T	13T
UN335	TVS SAMURAL	428H	428	112L	41T	13T
UN336	TVS CENTRA	428H	428	102L	41T	14T
UN337	TVS STAR	428H	428	112L	44T	14T
UN338	TVS STAR CITY / DELUXE	428H	428	110L	41T	13T
UN339	YAMAHA RX100	428H	428	110L	39T	15T
UN340	YAMAHA RXG	428H	428	110L	37T	15T
UN341	BAJAJ CALIBER 115	428H	428	116L	43T	13T
UN342	BAJAJ DISCOVER	428H	428	122L	45T	14T
UN343	BAJAJ DISCOVER(110CC)	428H	428	120L	42T	14T
UN344	BAJAJ DISCOVER(125CC)	428H	428	120L	42T	14T
UN345	BAJAJ DISCOVER UG (Alloy wheel)	428H	428	122L	45T	14T
UN346	BAJAJ WIND 125	428H	428	118L	44T	14T
UN347	HERO HONDA SUPER SPLENDOR	428H	428	108L	42T	14T
UN348	HERO HONDA GLAMOUR	428H	428	108L	43T	14T
UN349	HONDA SHINE	428H	420	116L	41T	14T
UN350	KINETIC CHALLENGER / BOSS	428H	428	108L	45T	14T
UN351	LML FREEDOM	428H	428	114L	40T	14T
UN352	SUZUKI HEAT / ZEUS	428H	428	114L	40T	14T
UN353	TVS SHOGUN	428H	428	112L	44T	13T
UN354	TVS VICTOR / VICTOR GL	428H	428	106L	43T	13T
UN355	TVS VICTOR GLX	428H	428	112L	41T	13T
UN356	TVS VICTOR GX	428H	428	110L	43T	13T

CHAIN KITS FOR VIETNAM

永利百合越南市场套链型号Unibear Chain Kit for Vietnam						
产品编号（item code）	型号(Model)	链条(Chain NO.)			链轮(Sprockets)	
		加强(Reinfored)	普通(Normal)	节数(Links)	大齿(rear)	小齿(front)
UN315	DY100	428H	428	100L	36T	14T
UN316		428H	428	102L	36T	14T

UNIBEAR® SLCC®

CHAIN KITS FOR INDIA

产品编号 (Item code)	型号(Model)	链条(Chain NO.)			链轮(Sprockets)	
		加强(Reinfored)	普通(Normal)	节数(Links)	大齿(rear)	小齿(front)
UN 357	YAMAHA CRUX	428H	428	112L	42T	14T
UN 358	YAMAHA LIBERO	428H	428	118L	45T	14T
UN 359	YAMAHA ENTICER	428H	428	130L	47T	15T
UN 360	YAMAHA YBX / YD 125	428H	428	112L	44T	14T
UN 361	BAJAJ PULSAR 150	428H	428	114L	42T	15T
UN 362	BAJAJ PULSAR180	428H	428	112L	42T	15T
UN 363	BAJAJ PULSAR DTSI (150/180)	428H	428	122L	42T	15T
UN 364	BAJAJ PULSAR UG (Alloy wheel)	428H	428	124L	44T	15T
UN 365	BAJAJ PULSAR NEW (180cc)	428H	428	124L	43T	15T
UN 366	BAJAJ PULSAR (180cc)	428H	428	124L	44T	15T
UN 367	BAJAJ AVENGER	428H	428	124L	42T	14T
UN 368	ESCORTS RAJDOOT NEW 175CC	428H	428	122L	47T	14T
UN 369	ESCORTS RAJDOOT OLD 175CC	428H	428	122L	47T	14T
UN 370	HERO HONDA ACHIEVER	428H	428	120L	42T	15T
UN 371	HERO HONDA CBZ	428H	428	128L	46T	14T
UN 372	HERO HONDA AMBITION	428H	428	116L	38T	14T
UN 373	HERO HONDA KARIZMA	428H	428	108L	40T	13T
UN 374	HONDA UNICORN	428H	428	126L	42T	15T
UN 375	LML ADRENO / ENERGY	428H	428	116L	40T	14T
UN 376	TVS FIERO	428H	428	110L	39T	13T
UN 377	TVS FIERO F2	428H	428	116L	40T	13T
UN 378	TVS FIERO FX	428H	428	118L	40T	13T
UN 379	TVS APACHE	428H	428	118L	43T	13T
UN 380	YAMAHA RX 135	428H	428	108L	34T	16T
UN 381	BAJAJ M80-4S	428H	428	100L	44T	13T
UN 382	BAJAJ M80 (NEW)	428H	428	104L	36T	17T
UN 383	BAJAJ M80 (FLAT)	428H	428	104L	36T	17T
UN 384	BAJAJ M80 (OLD)	428H	428	104L	36T	17T
UN 385	HERO PUCH - ECONOMY	415H	415	94L	33T	13T
UN 386	HERO PANTHER (OLD)	415H	415	100L	48T	12T
UN 387	HERO PANTHER (NEW)	428H	428	100L	48T	12T
UN 388	HERO PANTHER 4S	428H	428	100L	40T	14T
UN 389	BULLET 350CC(NEW)	530H	530	94L	38T	16T
UN 390	TVS 50 XL	415H	415	112L	52T	13T
UN 391	TVS 50 XT	415H	415	106L	47T	13T
UN 392	TVS XL-SUPER	415H	415	112L	50T	13T
UN 393	TVS XL-SUPER (NEW)	415H	415	112L	50T	13T
UN 394	TVS XL HEAVY DUTY	420H	420	112L	50T	13T
UN 395	TVS XL HEAVY DUTY (E)	415H	415	112L	50T	13T
UN 396	TVS DURO XL SUPER (HD)	420H	420	112L	50T	13T
UN 397	TVS DURO XL SUPER HD Upgrade New	420H	420	110L	50T	13T

UNIBEAR®

MOTORCYCLE SPROCKETS

STREET / OFF-ROAD / MOTOCROSS / ATV / ROADRACING / DRAGRACING

UNIBEAR® SLCC®

DOMESTIC SERIES



型号Model: FXD 125

齿数Teeth Numder: Z 46
齿顶圆直径Outside Diameter: D Ø192.5MM
中心孔直径Center Hole: D Ø64MM
齿根圆直径Root Diameter: D1 Ø177.6MM
齿厚Tooth Thickness: 7MM
定位孔中心距Center Distance: Ø80MM
定位孔直径Pilot Hole Diameter: Ø8.5MM
材质Material: 1045#
硬度Hardness: HRB70-80
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B



型号Model: DY 100

齿数Teeth Numder: Z 36
齿顶圆直径Outside Diameter: D Ø152.01MM
中心孔直径Center Hole: D Ø54MM
齿根圆直径Root Diameter: D1 Ø137.2MM
齿厚Tooth Thickness: 7MM
定位孔中心距Center Distance: Ø70MM
定位孔直径Pilot Hole Diameter: Ø8.5MM
材质Material: 1045#
硬度Hardness: HRB70-80
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B



型号Model: JD 125

齿数Teeth Numder: Z 39
齿顶圆直径Outside Diameter: D Ø164.17MM
中心孔直径Center Hole: D Ø58MM
齿根圆直径Root Diameter: D1 Ø149.31MM
齿厚Tooth Thickness: 7MM
定位孔中心距Center Distance: Ø78MM
定位孔直径Pilot Hole Diameter: Ø8.5MM
材质Material: 1045#
硬度Hardness: HRB70-80
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B



型号Model: WY 125

齿数Teeth Numder: Z 38
齿顶圆直径Outside Diameter: D Ø160.12MM
中心孔直径Center Hole: D Ø58MM
齿根圆直径Root Diameter: D1 Ø145.28MM
齿厚Tooth Thickness: 7MM
定位孔中心距Center Distance: Ø90MM
定位孔直径Pilot Hole Diameter: Ø10.5MM
材质Material: 1045#
硬度Hardness: HRB70-80
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B

UNIBEAR® SLCC®

SOUTH AMERICA SERIES



型号Model: TITAN 2000

齿数Teeth Numder: Z 44
齿顶圆直径Outside Diameter: D Ø184.37MM
中心孔直径Center Hole: D Ø64MM
齿根圆直径Root Diameter: D1 Ø169.47MM
齿厚Tooth Thickness: 7MM
平面凹槽Step Diameter: Ø80MM-Ø112MM
定位孔中心距Center Distance: Ø96MM
定位孔直径Pilot Hole Diameter: Ø10.5MM
材质Material: 1045#
硬度Hardness: HRB70-80
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B
带保护盘With protector



型号Model: NXR150 BROSS

齿数Teeth Numder: Z 50
齿顶圆直径Outside Diameter: D Ø208.71MM
中心孔直径Center Hole: D Ø125MM
齿根圆直径Root Diameter: D1 Ø193.75MM
齿厚Tooth Thickness: 7MM
平面凹槽Step Diameter: Ø175MM
定位孔中心距Center Distance: Ø153MM
定位孔直径Pilot Hole Diameter: Ø8.5MM
材质Material: 1045#
硬度Hardness: HRB70-80
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B
扩孔Broaching



型号Model: C100-BIZ

齿数Teeth Numder: Z 35
齿顶圆直径Outside Diameter: D Ø148.01MM
中心孔直径Center Hole: D Ø58MM
齿根圆直径Root Diameter: D1 Ø133.2MM
齿厚Tooth Thickness: 7MM
定位孔中心距Center Distance: Ø90MM
定位孔直径Pilot Hole Diameter: Ø8.5MM
材质Material: 1045#
硬度Hardness: HRB70-80
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B
带保护盘With protector



型号Model: XLR 125

齿数Teeth Numder: Z 50
齿顶圆直径Outside Diameter: D Ø208.71MM
中心孔直径Center Hole: D Ø64MM
齿根圆直径Root Diameter: D1 Ø193.75MM
齿厚Tooth Thickness: 7MM
油线圆直径Oil Groove Diameter: Ø180MM
定位孔中心距Center Distance: Ø96MM
定位孔直径Pilot Hole Diameter: Ø10.5MM
材质Material: 1045#
硬度Hardness: HRB70-80
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B
带钉With Screw

UNIBEAR® SLCC®

AFRICA SERIES



型号Model: C 70

齿数Teeth Numder: Z 36
齿顶圆直径Outside Diameter: D Ø152.01MM
中心孔直径Center Hole: D Ø54MM
齿根圆直径Root Diameter: D1 Ø137.86MM
齿厚Tooth Thickness: 6MM
平面凹槽Step Diameter: Ø90MM
定位孔中心距Center Distance: Ø70MM
定位孔直径Pilot Hole Diameter: Ø54MM
材质Material: 1045#
硬度Hardness: HRB70-80
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr7.8MM
适配ISO链号Adaptive ISO Chain Number: 085



型号Model: AX 100

齿数Teeth Numder: Z 42
齿顶圆直径Outside Diameter: D Ø176.32MM
中心孔直径Center Hole: D Ø52MM
齿根圆直径Root Diameter: D1 Ø161.43MM
齿厚Tooth Thickness: 7MM
定位孔中心距Center Distance: Ø68MM
定位孔直径Pilot Hole Diameter: Ø8.5MM
材质Material: 1045#
硬度Hardness: HRB70-80
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B



型号Model: RS 125

齿数Teeth Numder: Z 37
齿顶圆直径Outside Diameter: D Ø156.03MM
中心孔直径Center Hole: D Ø64MM
齿根圆直径Root Diameter: D1 Ø141.22MM
齿厚Tooth Thickness: 7MM
定位孔中心距Center Distance: Ø80MM
定位孔直径Pilot Hole Diameter: Ø8.5MM
材质Material: 1045#
硬度Hardness: HRB70-80
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B



型号Model: CG 125

齿数Teeth Numder: Z 38
齿顶圆直径Outside Diameter: D Ø160.12MM
中心孔直径Center Hole: D Ø58MM
齿根圆直径Root Diameter: D1 Ø145.28MM
齿厚Tooth Thickness: 7MM
平面凹槽Step Diameter: Ø75MM-Ø105MM
定位孔中心距Center Distance: Ø90MM
定位孔直径Pilot Hole Diameter: Ø10.5MM
材质Material: 1045#
硬度Hardness: HRB70-80
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B

UNIBEAR® SLCC®

INDONESIA SERIES



型号Model: SUPRA

齿数Teeth Numder: Z 40
齿顶圆直径Outside Diameter: D Ø168.22MM
中心孔直径Center Hole: D Ø54MM
齿根圆直径Root Diameter: D1 Ø153.35MM
齿厚Tooth Thickness: 7MM
平面凹槽Step Diameter: Ø90MM
定位孔中心距Center Distance: Ø70MM
定位孔直径Pilot Hole Diameter: Ø8.5MM
材质Material: 1045#
硬度Hardness: HRB70-80
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B



型号Model: SUPER FIT NEW

齿数Teeth Numder: Z 36
齿顶圆直径Outside Diameter: D Ø152.01MM
中心孔直径Center Hole: D Ø58MM
齿根圆直径Root Diameter: D1 Ø137.2MM
齿厚Tooth Thickness: 7MM
定位孔中心距Center Distance: Ø90MM
定位孔直径Pilot Hole Diameter: Ø8.5MM
材质Material: 1045#
硬度Hardness: HRB70-80
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B
扩孔Broaching



型号Model: GLPRO NEO

齿数Teeth Numder: Z 46
齿顶圆直径Outside Diameter: D Ø192.5MM
中心孔直径Center Hole: D Ø58MM
齿根圆直径Root Diameter: D1 Ø177.6MM
齿厚Tooth Thickness: 7MM
平面凹槽Step Diameter: Ø75MM-Ø105MM
定位孔中心距Center Distance: Ø90MM
定位孔直径Pilot Hole Diameter: Ø10.5MM
材质Material: 1045#
硬度Hardness: HRB70-80
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B
带保护盘With protector



型号Model: FORCE-1

齿数Teeth Numder: Z 39
齿顶圆直径Outside Diameter: D Ø164.17MM
中心孔直径Center Hole: D Ø64MM
齿根圆直径Root Diameter: D1 Ø149.31MM
齿厚Tooth Thickness: 7MM
定位孔中心距Center Distance: Ø80MM
定位孔直径Pilot Hole Diameter: Ø8.5MM
材质Material: 1045#
硬度Hardness: HRB70-80
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B

INDIA SERIES



型号Model: PULSAR

齿数Teeth Numder: Z 42
齿顶圆直径Outside Diameter: D Ø176.32MM
中心孔直径Center Hole: D Ø58MM
齿根圆直径Root Diameter: D1 Ø161.43MM
齿厚Tooth Thickness: 7MM
定位孔中心距Center Distance: Ø78MM
定位孔直径Pilot Hole Diameter: Ø8.5MM
材质Material: 1045#
硬度Hardness: HRB70–80
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr7.8MM
适配ISO链号Adaptive ISO Chain Number: 08B



型号Model: RAJDOOT N/M

齿数Teeth Numder: Z 47
齿顶圆直径Outside Diameter: D Ø196.57MM
中心孔直径Center Hole: D Ø66MM
齿根圆直径Root Diameter: D1 Ø181.63MM
齿厚Tooth Thickness: 7MM
平面凹槽Step Diameter: Ø159MM
定位孔中心距Center Distance: Ø92MM
定位孔直径Pilot Hole Diameter: Ø10.5MM
材质Material: 1045#
硬度Hardness: HRB70–80
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B



型号Model: SPLENDER

齿数Teeth Numder: Z 45
齿顶圆直径Outside Diameter: D Ø188.57MM
中心孔直径Center Hole: D Ø54MM
齿根圆直径Root Diameter: D1 Ø173.63MM
齿厚Tooth Thickness: 7MM
平面凹槽Step Diameter: Ø90MM
定位孔中心距Center Distance: Ø70MM
定位孔直径Pilot Hole Diameter: Ø8.5MM
油线圆直径Oil Groove Diameter: Ø162MM
材质Material: 1045#
硬度Hardness: HRB70–80
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B



型号Model: TVS XL SUPPER

齿数Teeth Numder: Z 50
齿顶圆直径Outside Diameter: D Ø208.71MM
中心孔直径Center Hole: D Ø52MM
齿根圆直径Root Diameter: D1 Ø194.40MM
齿厚Tooth Thickness: 6MM
定位孔中心距Center Distance: Ø68MM
定位孔直径Pilot Hole Diameter: Ø8.5MM
材质Material: 1045#
硬度Hardness: HRB70–80
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr7.8MM
适配ISO链号Adaptive ISO Chain Number: 085

FRONT SPROCKET SERIES



型号Model: WY 125

齿数Teeth Numder: Z 15
齿顶圆直径Outside Diameter: D Ø66.60MM
中心孔直径Center Hole: D Ø17.8MM
齿根圆直径Root Diameter: D1 Ø52.57MM
齿厚Tooth Thickness: 7MM
螺丝孔Screwhole: M6*2*Ø34MM
花键Spline: Z6–4*20MM
材质Material: 20CrMnTi
硬度Hardness: HRC60–63
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B



型号Model: DY 100

齿数Teeth Numder: Z 14
齿顶圆直径Outside Diameter: D Ø62.50MM
中心孔直径Center Hole: D Ø14MM
齿根圆直径Root Diameter: D1 Ø48.56MM
齿厚Tooth Thickness: 7MM
螺丝孔Screwhole: M6*2*Ø30MM
花键Spline: Z6–4*17MM
材质Material: 20CrMnTi
硬度Hardness: HRC60–63
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B



型号Model: GRAND

齿数Teeth Numder: Z 14
齿顶圆直径Outside Diameter: D Ø62.50MM
中心孔直径Center Hole: D Ø14MM
齿根圆直径Root Diameter: D1 Ø48.56MM
齿厚Tooth Thickness: 7MM
螺丝孔Screwhole: M6*2*Ø30MM
花键Spline: Z6–4*17MM
材质Material: 20CrMnTi
硬度Hardness: HRC60–63
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B



型号Model: RC 100

齿数Teeth Numder: Z 14
齿顶圆直径Outside Diameter: D Ø62.50MM
中心孔直径Center Hole: D Ø13MM
齿根圆直径Root Diameter: D1 Ø48.56MM
齿厚Tooth Thickness: 7MM
花键Spline: Z6–3.5*16MM
材质Material: 20CrMnTi
硬度Hardness: HRC60–63
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B



型号Model: CG 125

齿数Teeth Numder: Z 15
齿顶圆直径Outside Diameter: D Ø66.60MM
中心孔直径Center Hole: D Ø17.8MM
齿根圆直径Root Diameter: D1 Ø52.57MM
齿厚Tooth Thickness: 7MM
螺丝孔Screwhole: M6*2*Ø34MM
花键Spline: Z6–4*20MM
材质Material: 20CrMnTi
硬度Hardness: HRC60–63
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B

型号Model: SUPRA

齿数Teeth Numder: Z 15
齿顶圆直径Outside Diameter: D Ø66.60MM
中心孔直径Center Hole: D Ø14MM
齿根圆直径Root Diameter: D1 Ø52.57MM
齿厚Tooth Thickness: 7MM
螺丝孔Screwhole: M6*2*Ø30MM
花键Spline: Z6–4*17MM
材质Material: 20CrMnTi
硬度Hardness: HRC60–63
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B



型号Model: GS 125

齿数Teeth Numder: Z 14
齿顶圆直径Outside Diameter: D Ø62.50MM
中心孔直径Center Hole: D Ø18MM
齿根圆直径Root Diameter: D1 Ø48.56MM
齿厚Tooth Thickness: 7MM
花键Spline: Z18–20MM
材质Material: 20CrMnTi
硬度Hardness: HRC60–63
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B



型号Model: AX 100

齿数Teeth Numder: Z 14
齿顶圆直径Outside Diameter: D Ø62.50MM
中心孔直径Center Hole: D Ø16MM
齿根圆直径Root Diameter: D1 Ø48.56MM
齿厚Tooth Thickness: 7MM
花键Spline: Z6–4*20MM
材质Material: 20CrMnTi
硬度Hardness: HRC60–63
节距Pitch: P12.7MM
滚子直径Roller Diameter: Dr8.51MM
适配ISO链号Adaptive ISO Chain Number: 08B


UNDER ISO 9001:2000 QUALITY MANAGEMENT CERTIFICATE
チエーン
耐摩耗
High wear resistance
Japan Technology
UNIBEAR
MOTORCYCLE
DRIVE CHAIN KIT
Applied advanced heat treatment process
Strong resistance to impact
Good wear resistance
Hi-tech heat treated alloy steel
Pre-stretched and anti-fatigue
Mesh Belt Conveyor Furnace use
solid roller and bush
30,000 kilometers guaranteed
Patented Packaging Counterfeiting Not Allowed
Http://www.hzyl.com.cn
TRANSMISSION KIT
CHAIN AND SPROCKET
UNIBEAR
MOTORCYCLE
O-RING CHAIN
HANGZHOU UNIBEAR INDUSTRIAL CO.,LTD.
Http://www.hzyl.com.cn

SLCC®


NEW!
SLCC
Special Motorcycle Parts
TRANSMISSION KIT
CHAIN AND SPROCKET
STEEL #SAE 1045
SLCC
Motorcycle Chains
ORIGINAL
EQUIPMENT
QUALITY
Quad-riveted
30,000 kilometers guaranteed
UNDER ISO 9001:2000
QUALITY MANAGEMENT CERTIFICATE
UNDER ISO 9001:2000

We supply the best for your transmission

UNIBEAR®

RUSHED OUT OF THE COUNTRY CROSS THE WORLD

冲出国门，跨向世界

二十载春花秋实，风雨一路洗尽铅华，
却褪不去永利人的热情和执着……
志存高远而胸怀广阔。
有远见才有未来，有梦想方能腾飞，
新起点，自有新境界，时空无限，奋斗不止……

Seventeen years of spring flowers and autumn fruit,
wind and rain has washed out the white lead
on the road
But can not take off the enthusiasm and devotion
of Yongli people……
Have great ambition and high aspiration
Only with foresight can you have future, only with
dream can you soar highly
New starting piont and new vista, limitless space
and time and never stop struggle……